


- Low profile package saves space
- Designed for use in hazardous areas
- Excellent resistance to shock and vibration
- 30mm standard through shaft, PEEK reduction hub available
- Hard anodized housing and high protection level of IP66
- High performance in temperatures from -40°C to +85°C
- Reinforced SSI output
- Wiring fault tolerant & 60Vdc overvoltage protection
- Resolution up to 16 bits



Certifications:

The LP Incremental Encoder is available with the following certifications

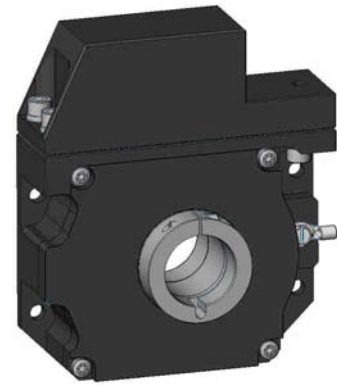

DEMKO 16 ATEX 1691X rev.0

IECEx UL 16.0064X Issue 0

Output:




Serial Synchronous Interface SSI output provides effective synchronisation in a closed-loop control system. A clock pulse train from a controller is used to shift out sensor data: one bit of position data is transmitted to the controller per clock pulse received by the sensor.

Mechanical Characteristics:


Material	Cover : Hard anodized aluminum	Vibrations (EN60068-2-6)	≤ 200m.s ⁻² (55 ... 2 000 Hz)
	Body : Hard anodized aluminum	Shaft inertia	< 130 000 g.mm ²
	Shaft : AISI 303 stainless steel	Static/Dynamic torque	30 / 300 mN.m
Ball bearings	6807 - Sealed	Continuous max. speed*	6000 min ⁻¹
Maximum loads	Axial: 40 N	Theoretical mechanical lifetime L ₁₀ **	> 18.10 ⁹ turns / 100000 hours
	Radial: 80 N	Encoder weight (approx.)	1.6 kg
Shocks (EN60068-2-27)	≤ 3000m.s ⁻² (during 5 ms)	** Continuous max. Speed – ½ max. load – ISO 281, L ₁₀	

* The temperature given on the following chart has to be added to the ambient temperature. The total must never exceed the maximum T°C given by the datasheet. These temperature elevations are typical values which should be considered as indications only.

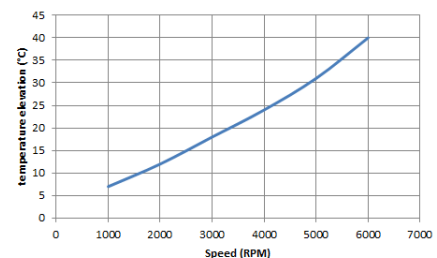

Available mechanics – shaft options:

AHAX: Shaft with Integrated coupling




AHUX: Through Hollow Shaft



AHKX: Blind Hollow Shaft




AHMX: Solid Shaft





Floating Mountings

Dimensions

AHUX – Through hollow shaft

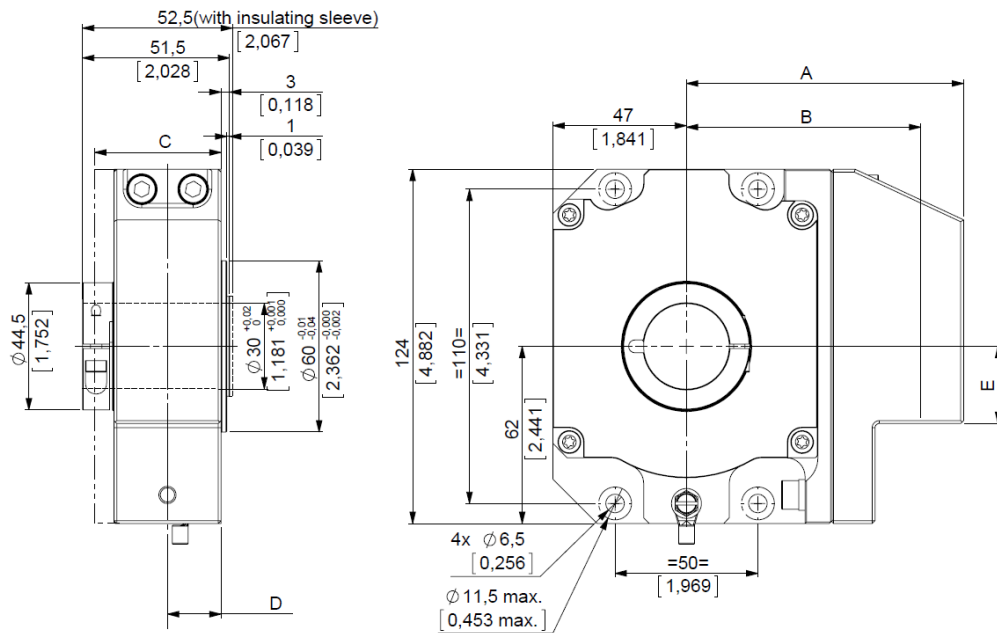



Ball end tether arm:
P/N :M9230-03/xxx
xxx = length in mm



Note :
CHc : Hexagonal socket head cap screws (recommended torque clamp screw CHc M4=3,5N.m, and Terminal Box CHc M6=6,5N.m)
HC : Hexagonal socket set screws (recommended torque Hc M6 : 2,5N.m)

Dimensions

AHKX – Blind hollow shaft

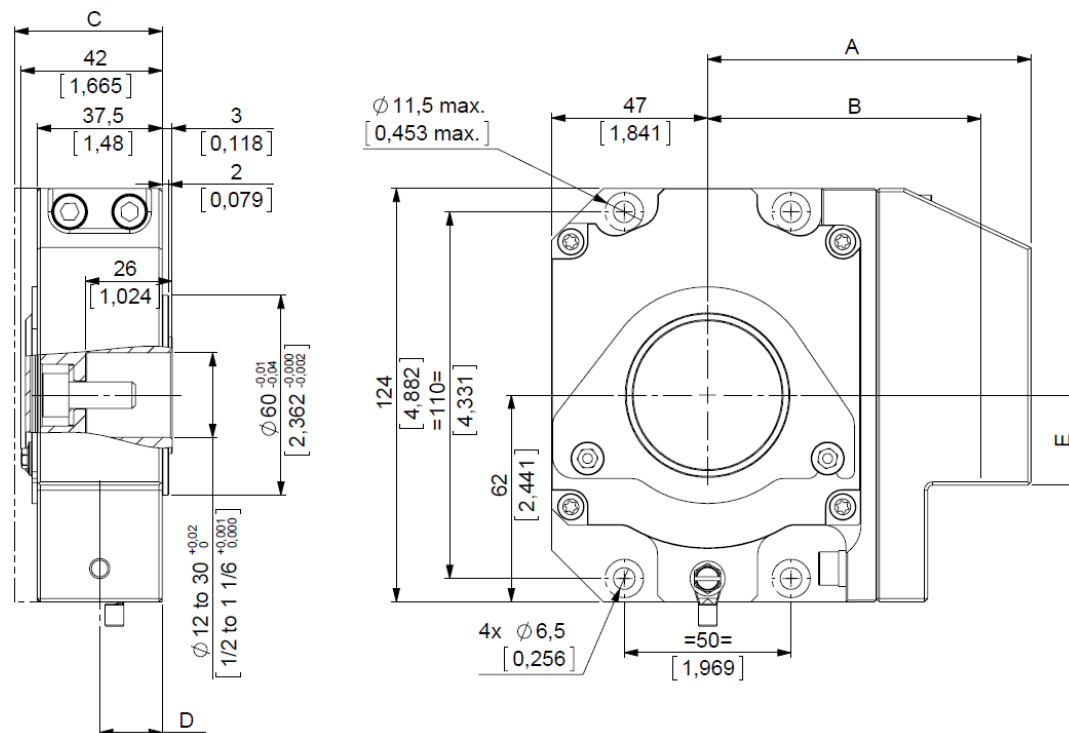


	M16-1/2" NPT Terminal Box	
	mm	inch
A	97	3.819
B	82	3.228
C	37,50	1.437
D	18,25	0.719
E	27	0.945
ØG (Cable gland)	31	1.220
Cable Ø	9 to 16	3/8 to 5/8

Flange Mountings


Dimensions

AHAX – Shaft with integrated coupling

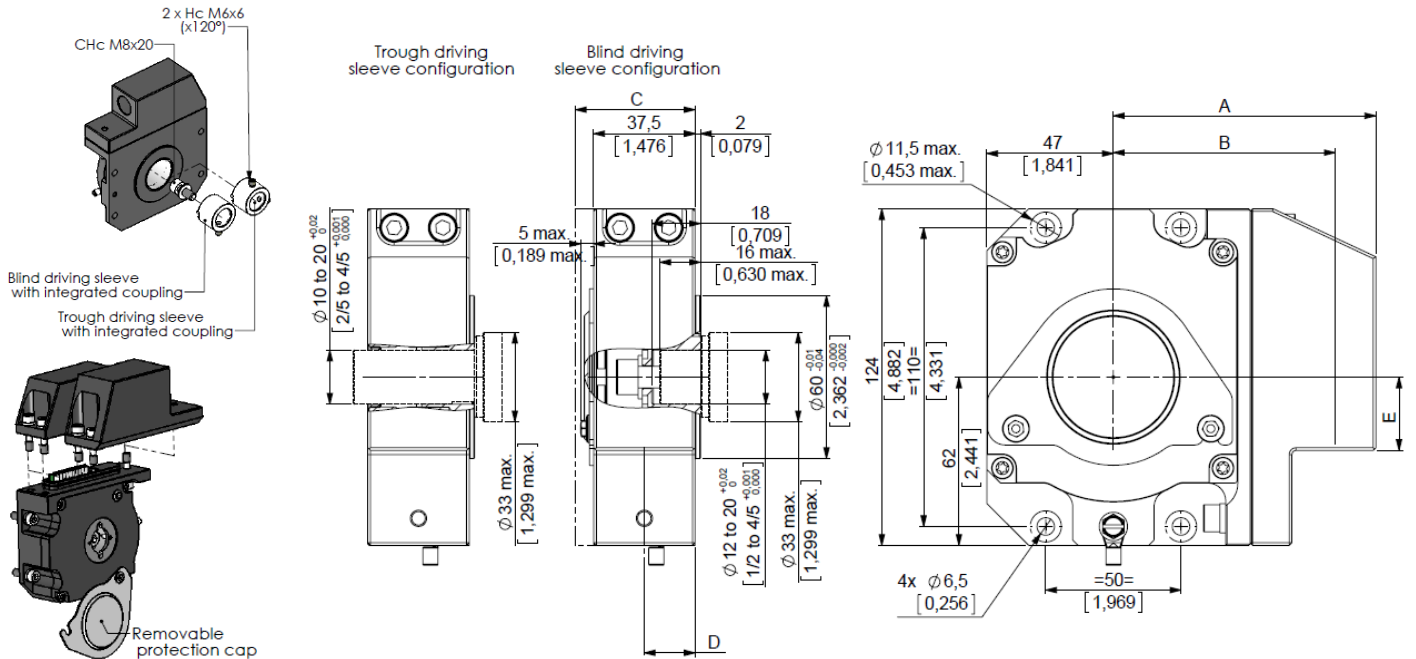

Dimensions

AHMX – Solid shaft

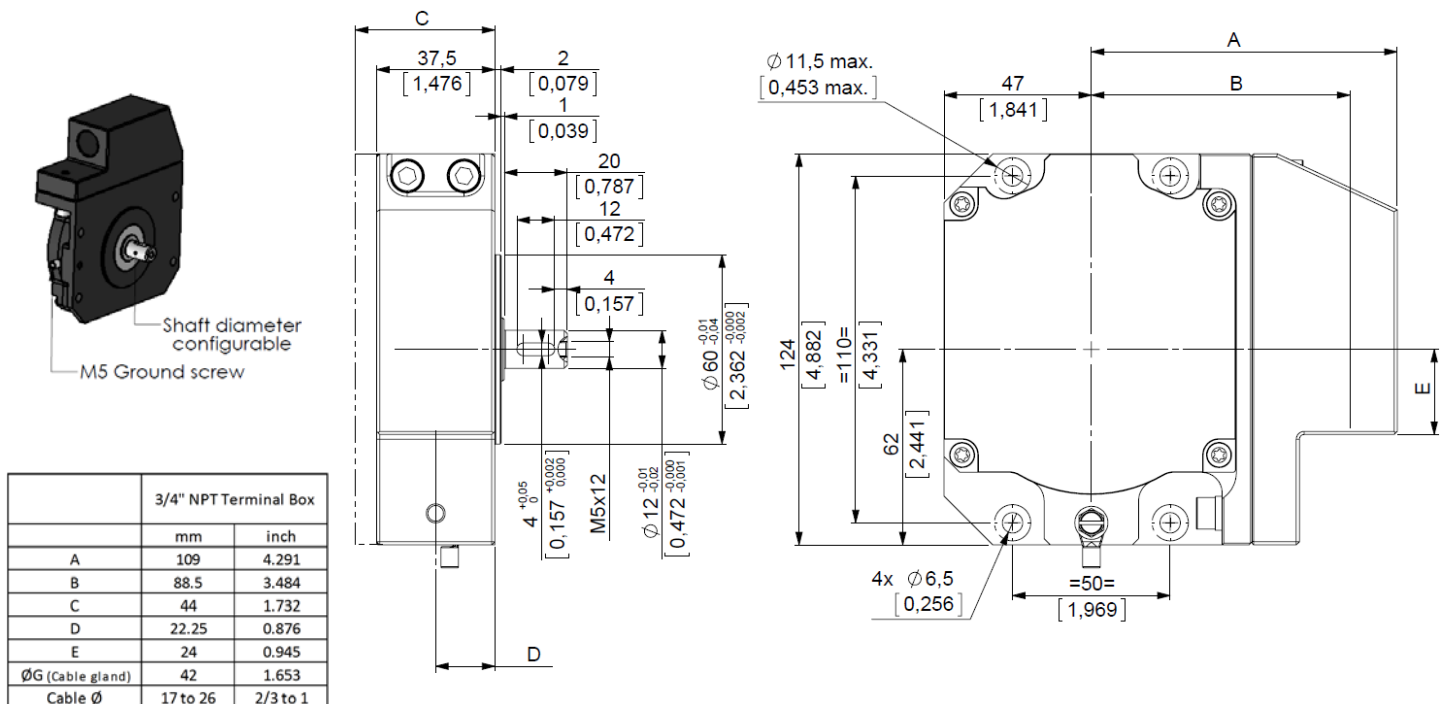

Electrical Characteristics:


Version	Output signals	Resolution	Operating Voltage Vcl	Supply current (no loads)	Current per channel pair	Max Frequency capability	Encoder accuracy	Short circuits proof	Reverse polarity tolerant	Wiring fault tolerant & 60Vdc overvoltage protection	Temperature range
PSR	RS422	up to 16 BITS	5-30V	75mA	40mA	1MHz	+/-0.1°	Yes (except to Vcl)	Yes	Yes	-40°C +85°C
PSS										No	

Terminal Box Connection:

-	+	Clk +	Clk -	Data +	Data -	RAZ	NC	Ground
1	2	3	4	5	6	7	8	9

Available Terminal Box versions:

- E0R: M16 without cable-gland
- E4R: 1/2" NPT without cable-gland
- E6R: 3/4" NPT without cable-gland

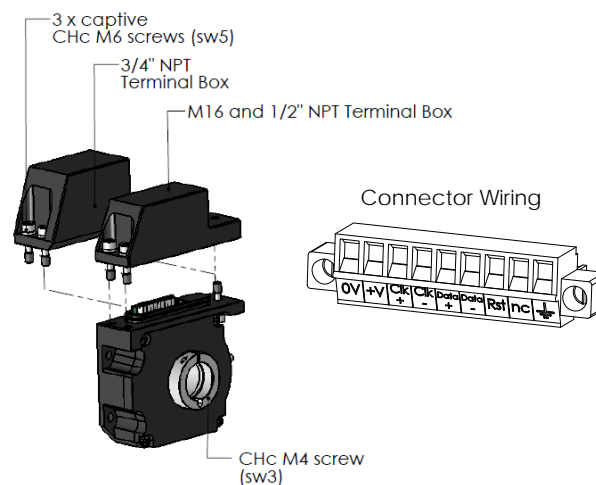

Available resolution:

Standard: 12 and 13 bits

For non-standard resolutions up to 16 bits, please contact factory

LP Absolute Ordering Options

Use this diagram, working from left to right to construct your model number (Example : AHAX_E6//PSRG//13//E5R//U6)

AH __	__	//	---	-	//	-----	//	---	---	//	---
TYPE:	SHAFT BORE:		VOLTAGE/ OUTPUT:	CODE:		CYCLES PER TURN:		OUTPUT TERMINATION:	CABLE LENGTH:		HUB:
AHUX = hollow shaft	E5 = 5/8" E6 = 3/4" E8 = 1" 30 = 30mm		PSR = 5-30V voltage and reinforced SSI output (without parity)	B = Binary (CCW increasing code)		(Enter bits)		SKR = M16 cable-gland with PUR cable	xxx = cable length ex 020 = 2meters		U3 = With insulated sleeve
AHKX = blind shaft				G = Gray (CCW increasing code)		See available resolutions above		E0R = M16 radial terminal box (without cable-gland)			U5 = Blind sleeve
AHAX = hollow shaft with integrated coupling	E6 = 3/4" 14 = 14mm 20 = 20mm		PSS = 5-30V voltage and SSI output (without parity)					E4R = 1/2" NPT radial terminal box (without cable-gland)	Blank = No cable		U6 = Through sleeve
AHMX = solid shaft	E3 = 3/8" 12 = 12mm							E6R = 3/4" NPT radial terminal box (without cable-gland)			** = no sleeve

Stainless steel option available.

Anti-rotation accessory: M9230-03/xxx Ball end tether arm (xxx = length in mm) to be ordered separately.

BEI SENSORS Europe

9, rue de Copenhague
Espace Européen de l'Entreprise-Schiltigheim
BP 70044 - 67013 STRASBOURG Cedex France
Tel: +33 (0)3-88-20-80-80 | Fax: +33 (0)3-88-20-87-87
email: info@beisensors.com

BEI SENSORS North America

1461 Lawrence Dr | Thousand Oaks, CA 91320 USA
Tel: 800-350-2727 or 805-968-0782
Fax: 800-960-2726 or 805-968-3154
email: beisales@beisensors.com
www.beisensors.com

SPECIAL CONDITIONS FOR SAFE USE:**None required.**

The gaps of the different flame paths are less than the values specified in the tables of the IEC 60079-1 standard.
The width of the different flameproof joints are superior to these specified in tables of IEC 60079-1 standard.
See Document 08329-001 for construction details.

ASSEMBLY CAUTION/WARNING:

**Keep terminal cover closed and cable gland secured while in presence of hazardous atmosphere.
Open all circuits to this product prior to removal of terminal block cover.**

Electrical installation shall use standard EN/IEC 60079-14 and/or NEC Class 2 circuit specifications. UL certified installations require the use of a sealing fitting certified to 60079-0 Ex d IIB within 18 in. (46 cm) of the encoder. Terminal block covers are marked near the threaded hole with the basic thread size to aid with selection of fittings or glands. Conductor insulation must be rated for at least 105°C ambient temperature. External case ground connection is provided by means of a screw and ring type terminal which accepts up to 10 AWG (5.26 mm²) size conductor.

The customer shall use our products according to our specifications and to the manners of the profession. BEI Sensors will not be responsible for any defect resulting from improper installation or from operating outside of the specification limits of the product. Malfunctions caused by excessive shocks, bad electric supply, under or over voltage, the environmental conditions outside of the design specifications, are not covered by warranty. The encoder doesn't require any maintenance. There are no user serviceable parts inside. Any defective encoder shall be returned to the nearest BEI Sensors facility for evaluation and repair/replacement. A high integrity case ground connection must be made at or near the encoder installation location.

See LP series User Manual for installation details and Specification Documents (no. 2000/008 or 2000/009) for product details not otherwise indicated on this document.

EU Declaration of Conformity

1. We, BEI Sensors, certify that **Models HH_X and AH_X** all resolutions, channel and output type options are explosion proof and flame proof as noted on the UL, IECEX and DEMKO certificates cited below.
2. With the following marking: II 2 G Ex d IIB T4 Gb
3. Designed and manufactured to comply with these directives:
ATEX : 2014/34/EU and CEM : 2014/30/EU
4. Complies with these standards:
ATEX: EN60079-0:2012+A11:2013, EN60079-1:2014,
IECEX: IEC60079-0:2011+IS1 2013, IEC60079-1:2014
5. As detailed in EC type examination certificates:
DEMKO 16 ATEX 1691X rev.0 and IECEx UL 16.0064X Issue 0
Product Quality Assurance Notification: **LCIE 03 ATEX Q8060**
Product Quality Assurance Report: **FR/LCI/QAR08 0002**
6. **EMC:** The following standards were also investigated for this certification: NFC 23-520, NFC 23-539, EN 50081-1, EN 55022 classe B, EN 55014, EN 61000-6-2, CEI 61000-4-2, CEI 61000-4-3, CEI61000-4-4, CEI 61000-4-5, CEI 61000-4-6, CEI 61000-4-8, CEI61000-4-11
7. The notified organization responsible for the follow-up of the **ATEX** directive is (Assessed by):
LCIE, B.P.8, F92260 Fontenay-aux-Roses - Identification number: 0081
8. The company in charge of certification **CEM** is: LCIE BUREAU VERITAS, Aire de la Thur 68840 Pulversheim

UL Declaration of Conformity

Part number **Model HH_X and AH_X** model for use in Class I, Group C & D


UL 1203 Explosion-Proof and Dust-Ignition-Proof Electrical Equipment for Use in Hazardous (Classified) Locations
C22.2 No. 30-M1986 - Explosion-Proof Enclosures for Use in Class I Hazardous Locations

UL Certificate No. E78446


The notified organization responsible for the follow-up inspections for this **UL listing** is (Assessed by):

UL International (France) SA
Espace Technologique de Saint-Aubin, Immeuble Explorer
Route de l'Orme des Merisiers – F-91190 SAINT AUBIN:
Identification number: 675


Unscrew the 3 CHc M6 screws to remove the connection box

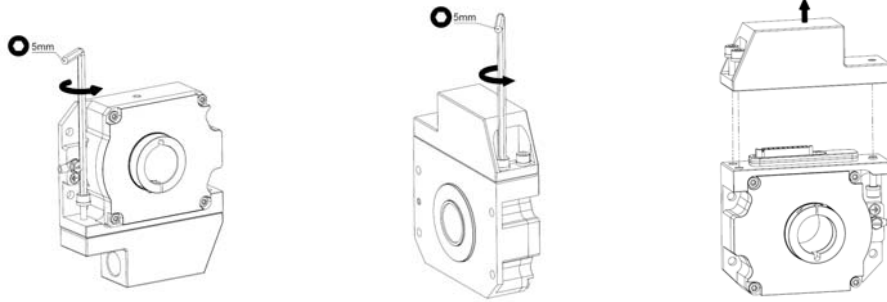


Slide right to unlock Connector Wiring

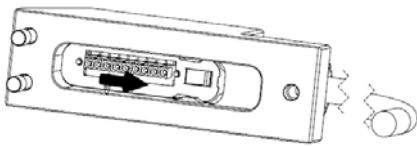


Align Bumps and Notches to take Connector out

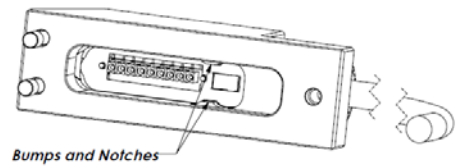


Prepare the wires




Tighten Pressure screw

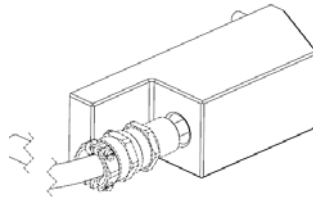


Crimp the wires and screw it on connector

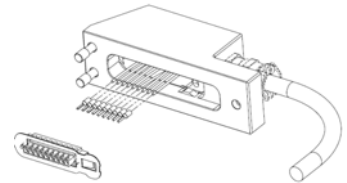


Align Bumps and Notches and push-in

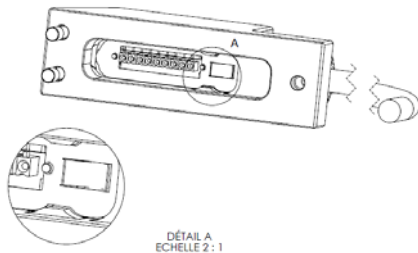

Slide left to lock connector in place

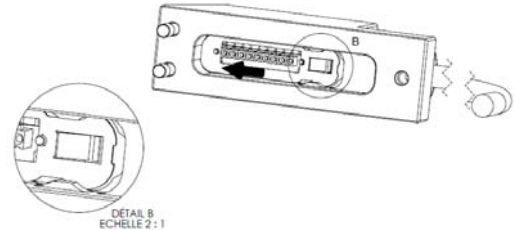

Put Connection box in place and screw 3 CHc screws on recommended torque

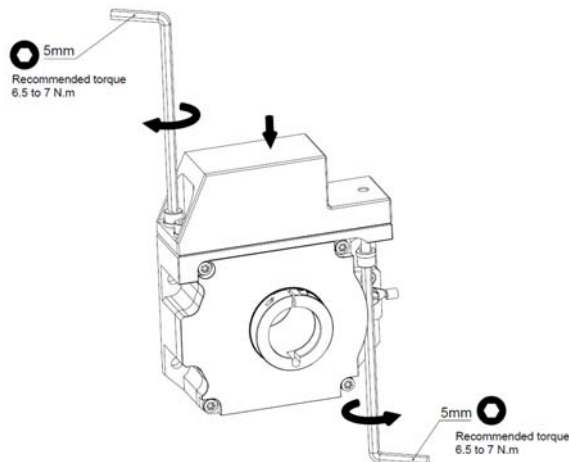

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates (“Sensata”) are solely intended to assist third parties (“Buyers”) who are developing systems that incorporate Sensata products (also referred to herein as “components”). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer’s systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED “AS IS”. SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata’s terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS’ PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Regional head offices:

United States of America

Sensata Technologies

Attleboro, MA

Phone: 508-236-3800

E-mail: support@sensata.com

Netherlands

Sensata Technologies Holland B.V.

Hengelo

Phone: +31 74 357 8000

E-mail: support@sensata.com

China

Sensata Technologies China Co., Ltd.

Shanghai

Phone: +8621 2306 1500

E-mail: support@sensata.com

Copyright © 2023 Sensata Technologies, Inc.