



48DC12-150 | DC TO DC CONVERTER

The 48DC12-150 supports 48V Lithium-Ion upgrades in a 12V infrastructure. Other combinations of voltages are also available.




Features

- Optional LCD remote display
- Thermally controlled cooling fan
- Provides automatic electronic short circuit/overload protection, and automatic over-temperature shutdown
- 48VDC input provided with a pre-attached pluggable connector with 4ft cable (other options available)
- Local status LED provides converter troubleshooting information at a glance
- Low battery protection automatically shuts down converter at 39.0 VDC with inrush delay
- High surge rating for large motor loads
- Rugged design for RV/Mobile environments
- Wide operating temperature range
- Provides parallel and/or redundant operation for up to three units
- Other voltage and current ratings available, contact factory for more information



SPECIFICATIONS

Input battery voltage range	39.0- 50.0 VDC, 44VDC Nominal
Surge voltage	Up to 60 VDC
Maximum output voltage	14.4 VDC
Nominal output voltage	12.6 VDC
Idle current (typical)	900 mADC
Continuous output power	1800 Watts @ 25°C
Output current (nominal)	150 ADC
Input current	Up to 50 ADC
Peak power (typical)	3100 Watts
Peak output current (typical)	300 ADC
Efficiency	90% at 50% of rated load
Operating temperature	-20° C to +65° C (-4° F to 149° F)
Input connector	Anderson Power SB®50 992G4 (colored blue)
Dimensions (l x w x h)	13.4" x 12.0" x 5.7" (34.0cm x 30.5cm x 14.5cm)
Weight	42 lb (19.1 kg)
Limited warranty	Three years

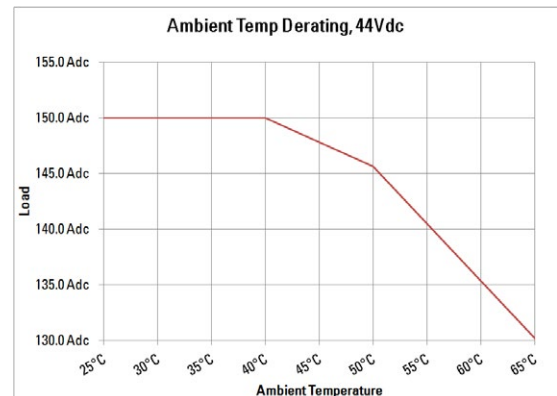

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas
425-353-8833
magnumsales@sensata.com
International
MagnumInternationalSales@sensata.com