


MODEL LP35 | LP SERIES

LOW PROFILE, NON-INCENDIVE INCREMENTAL OR ABSOLUTE ENCODER

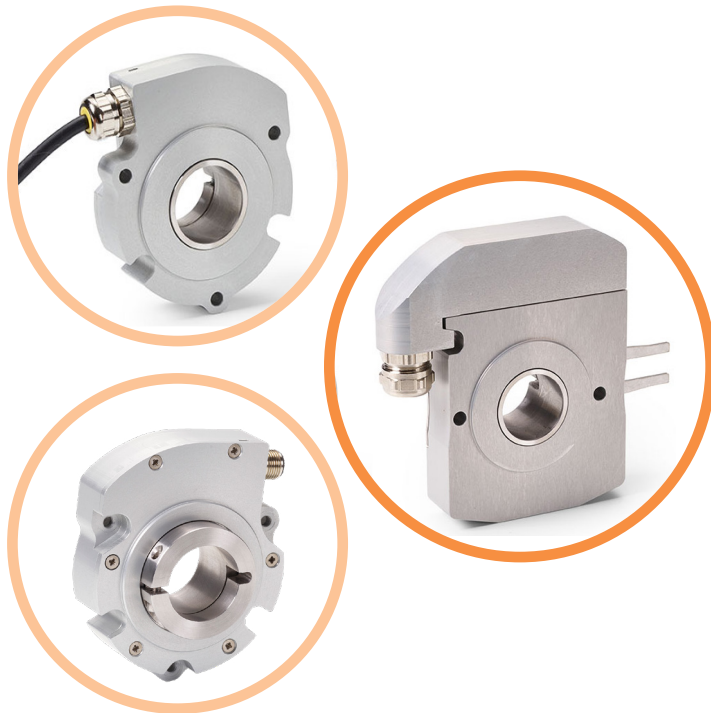

Features

- Certified for Class 1, Div 2 (Zone 2), Group A, B, C, D Hazardous Areas
- Low profile package saves space
- Excellent resistance to shock and vibration
- 30mm standard through shaft, PEEK reduction hub available
- High protection level of IP66
- High performance in temperatures from -40°C to +85°C
- Resolutions up to 10,000 PPR, incremental or 16 BITS absolute
- Terminal box, M12 or cable output terminations
- Encapsulated electronics
- TTL and HTL electronics
- Reinforced electrical output available on some incremental and absolute models
 - Wiring fault tolerant with terminal box connection
 - Long cable drive capability


SPECIFICATIONS

Mechanical


Housing Size	Standard: Ø 90mm X 26mm deep Terminal Box: 128mm tall X 116mm wide X 25mm deep. (See dimensional drawings for detail)
Shaft Size	Hollow Shaft: Ø 1/2" to Ø 30 mm" blind or through Solid Shaft: Ø12 mm x 20 mm with keyway, Ø 3/8" x 7/8" with flat Hollow Shaft w/ Integrated Coupling: 14mm, 20mm, 1/2", 3/4"
Permissible Shaft Loads	Axial: 40 N Radial: 80 N
Shaft Runout	Hollow Shaft: 0.1 mm [0.004"] TIR Solid Shaft: 0.02 mm [0.001"] TIR Hollow Shaft w/ Integrated Coupling: N/A ^(B)
Static/ Dynamic Torque	30 / 300 mN.m [4.2/ 42 oz-in] @ 25°C
Bearings	6807 - Sealed
Material	Cover: Clear anodized aluminum Body: Clear anodized aluminum Shaft: AISI 303 stainless steel
Bearing Life L₁₀h (Theoretical Mechanical Lifetime)	> 18 X 10 ⁹ turns / 100000 hours
Continuous Max. Speed	6000 RPM, (Reference Chart 1. Speed vs Temperature)
Shaft Moment of Inertia	< 84000 g.mm ² [11.9 x 10 ⁻³ oz*in*sec ²]
Weight (approx.)	Terminal Box: 790g M12 or cable: 450g

Chart 1. Speed vs Temperature


(Temperature on this chart to be added to ambient temperature. Do not exceed maximum temperature on datasheet.)

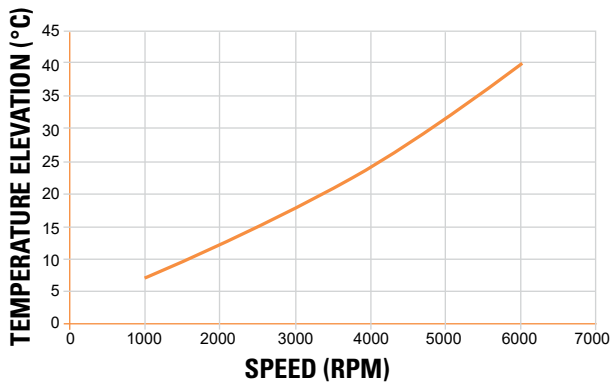


Cable or M12 Connection Shaft Options




Through Hollow Shaft



Blind Hollow Shaft



Shaft with Integrated coupling



Solid Shaft

Electrical

	Absolute	Incremental
Output Format	SSI compatible (RS422)	Two channels in quadrature + index and complements
Resolution	Up to 16 BITS	Up to 10,000 CPT
Encoder Accuracy	±0.1°	
Supply Voltage Vcl	5-30 Vdc	Cable or M12: 5-30V (28/V) and 4.75-30V (28/5) Terminal Box: 11-30V (28/VR), 5-30V (28/V) and 4.75-30V (28/5)
Supply Current (No Loads)	75mA Typ	Cable or M12: 75mA Terminal Box: 100mA (28/VR), 75mA (28/V and 28/5)
Current Per Channel Pair	40mA max	Cable or M12: 40mA Terminal Box: 60mA (28/VR), 40mA (28/V and 28/5)
Voltage / Output	28/SI: SSI RS485 w/o parity 28/SR: SSI RS485 reinforced w/o parity Terminal Box version only	28/V: Line driver 5-30 V In/Out; PushPull 28/5: Line driver with 5 V (TTL) regulated output 28/VR: Push Pull 11-30V reinforced. Terminal Box version only
Short Circuit Proof	28/SI: Yes (except to V+) 28/SR: Yes	Cable or M12: Yes (28/V) and Yes (except to Vcl) (28/5) Terminal Box: Yes (28/VR), (28/V) and (28/5) except to Vcl
Reverse Polarity Tolerant	Yes	
Wiring Fault Tolerant & Overvoltage Prot.	28/SI: No 28/SR: Yes	Cable or M12: No Terminal Box: Yes Up to 60Vdc (28/VR) and No (28/V and 28/5)
Frequency Response	Cable or M12: Up to 1MHz Terminal Box: Up to 300kHz (28/VR), Up to 1MHz (28/V and 28/5)	
Output Terminations	Cable, M12 or Terminal Box	
EMC	EN 61000-6-2 : 2005, see user manual for details EN 61000-6-4 : 2017 + A1 : 2011, see user manual for details	
Isolation	1000V	

Environmental


Protection Class (sealing)	IP66	
Temperature Range	Temp. Range: -40°C to +85°C	
Mechanical Resistance	Shock	(EN60068-2-27): $\leq 3000\text{m.s}^{-2}$ (5 ms, half sine) (300 G's)
	Vibration	(EN60068-2-6): $\leq 200\text{m.s}^{-2}$ (55 ... 2 000 Hz) (20 G's)
Humidity	98% RH without condensation	

OUTPUT WAVEFORMS


Waveform AA/ BB/ 00/ Channel B before A Clockwise (US convention is A leads B CCW)

Incremental Waveform


INDEX GATED WITH A & B HIGH (CODE Q28)

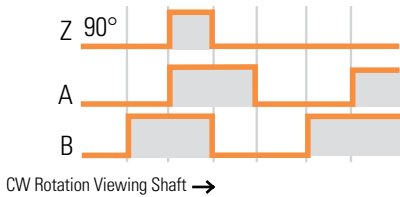

INDEX GATED WITH B LOW (CODE Q29)

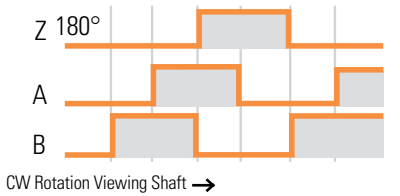


Absolute SSI Waveform

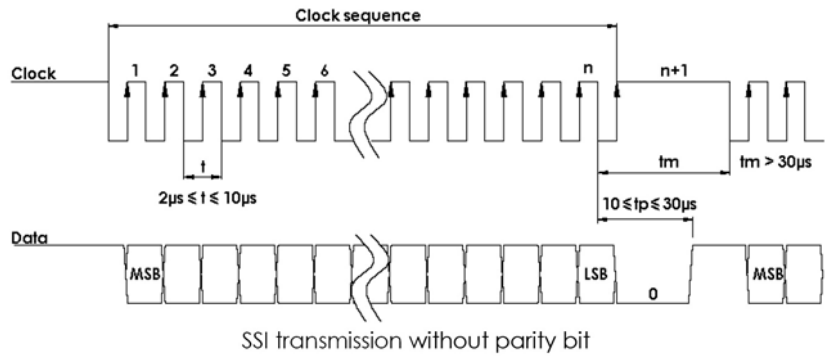

DIMENSIONS^(A)

All dimensions are in millimeters [inches]


Through hollow shaft

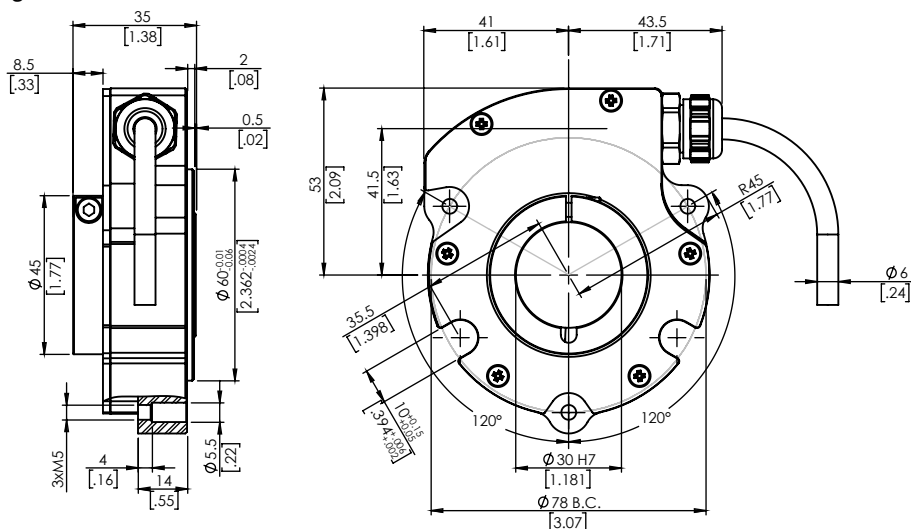



NOTE:

CHc : Hexagonal Socket head cap screws HC : Hexagonal socket set screws




CHc M4 Screw (SW3)

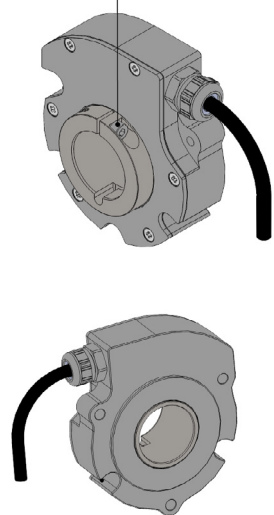





Blind hollow shaft

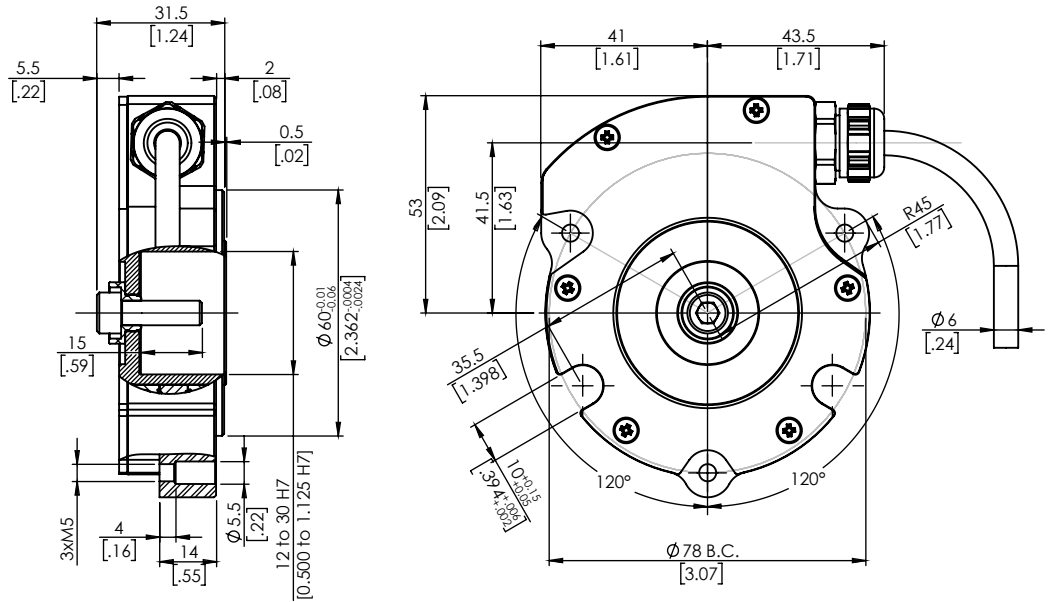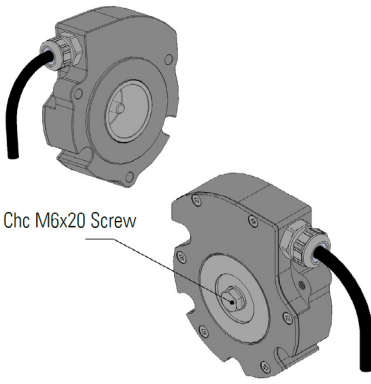


Shaft with integrated coupling

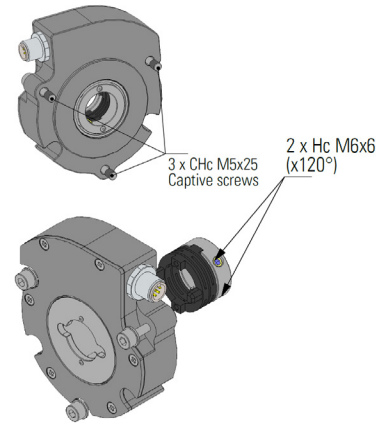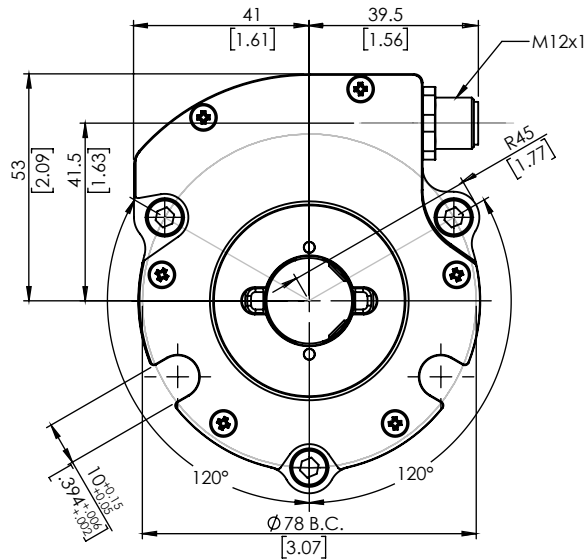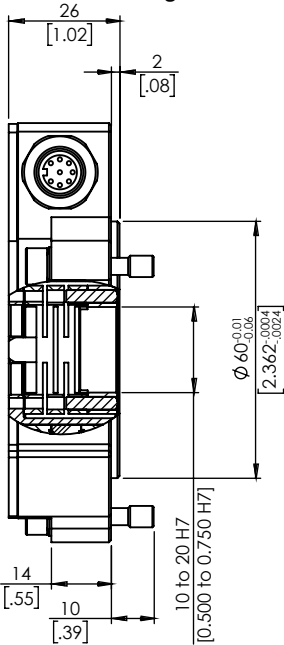



Solid shaft

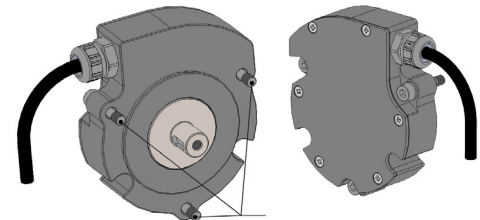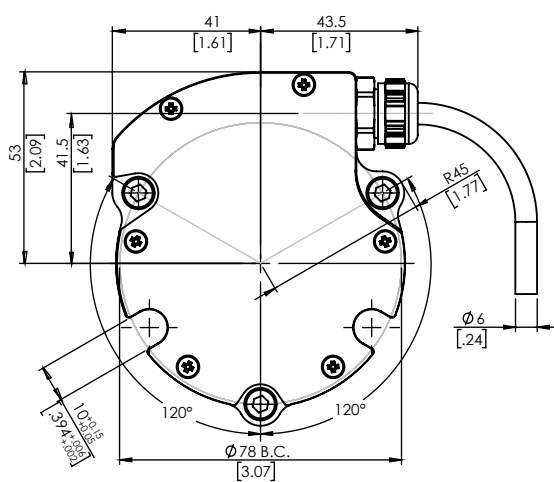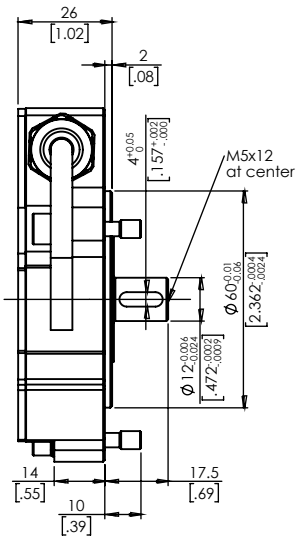

Ø 3/8 in. shaft with flat


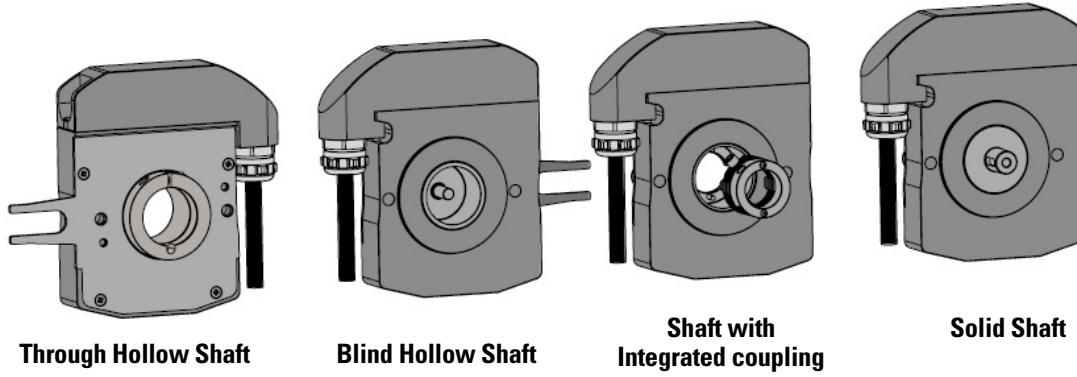


Through hollow shaft

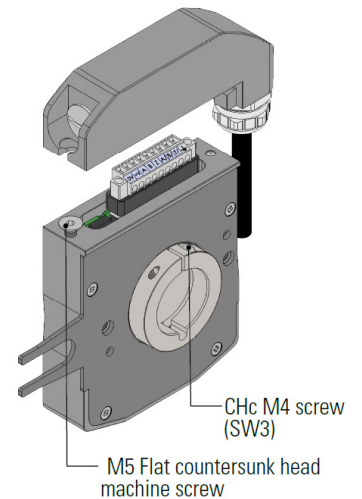
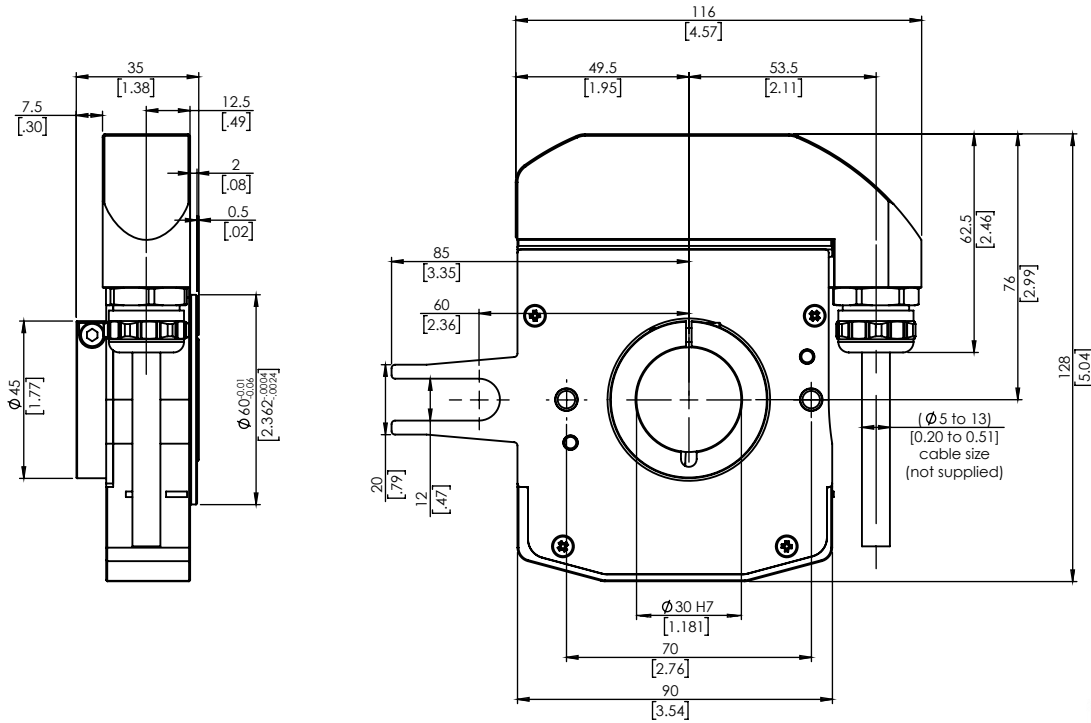


NOTE:
CHc : Hexagonal Socket head cap screws HC : Hexagonal socket set screws


Blind hollow shaft

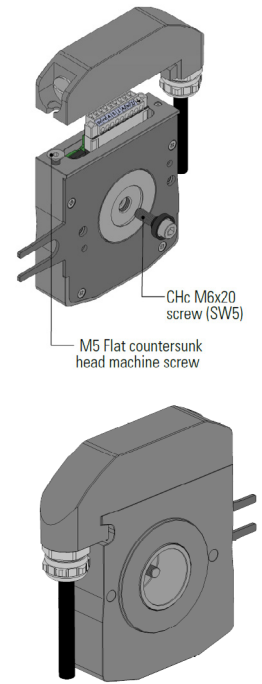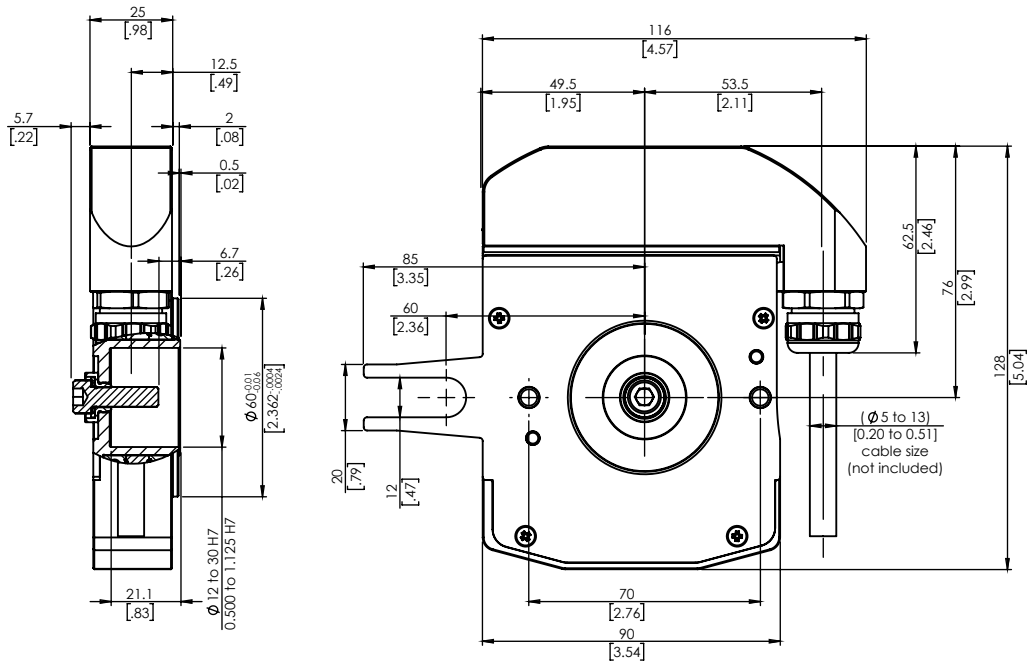

Shaft with integrated coupling

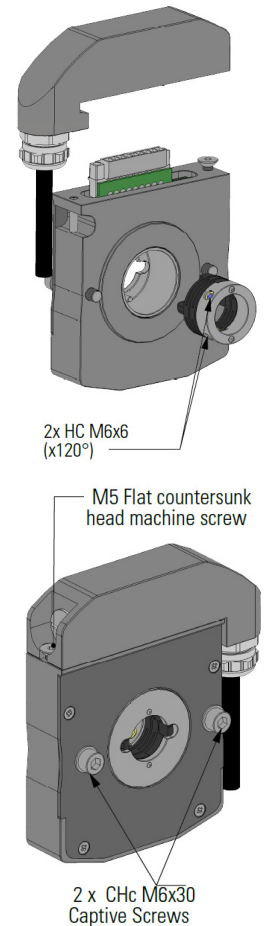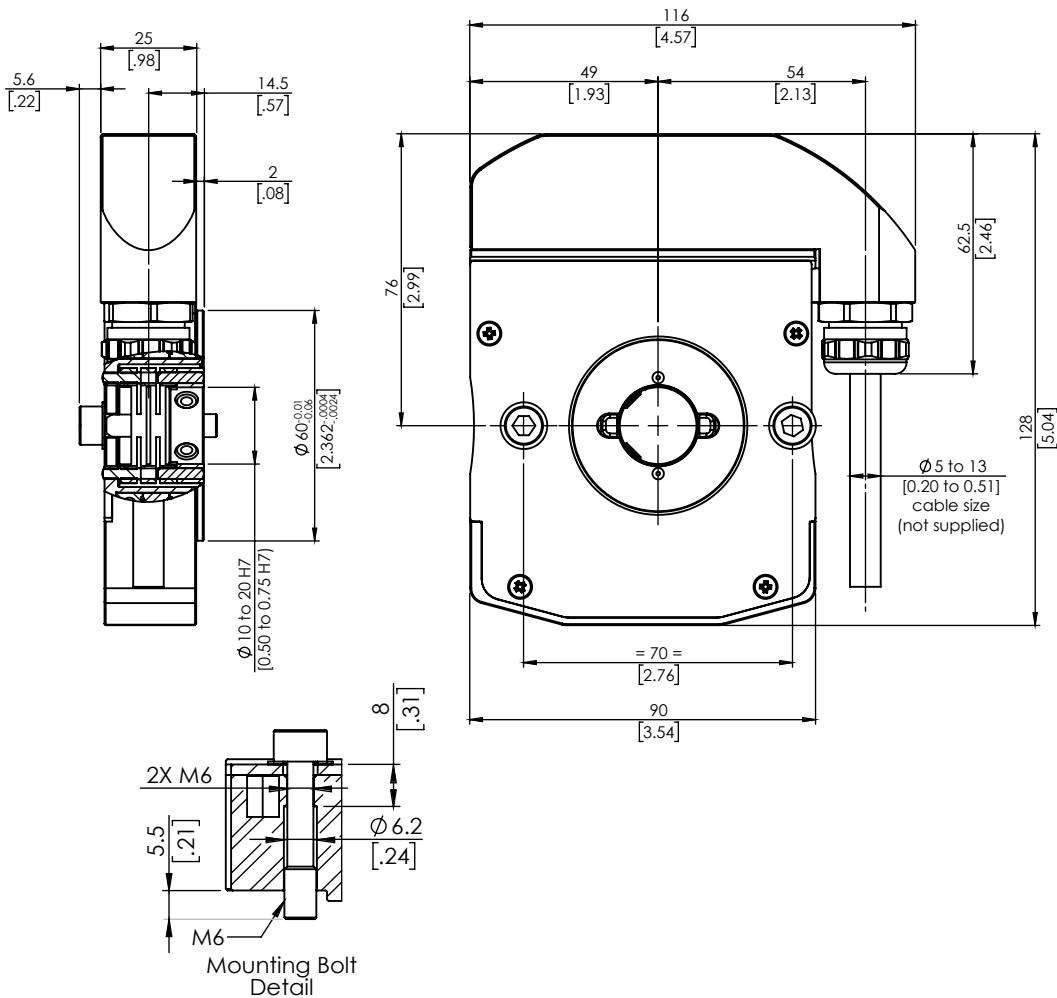


Solid shaft

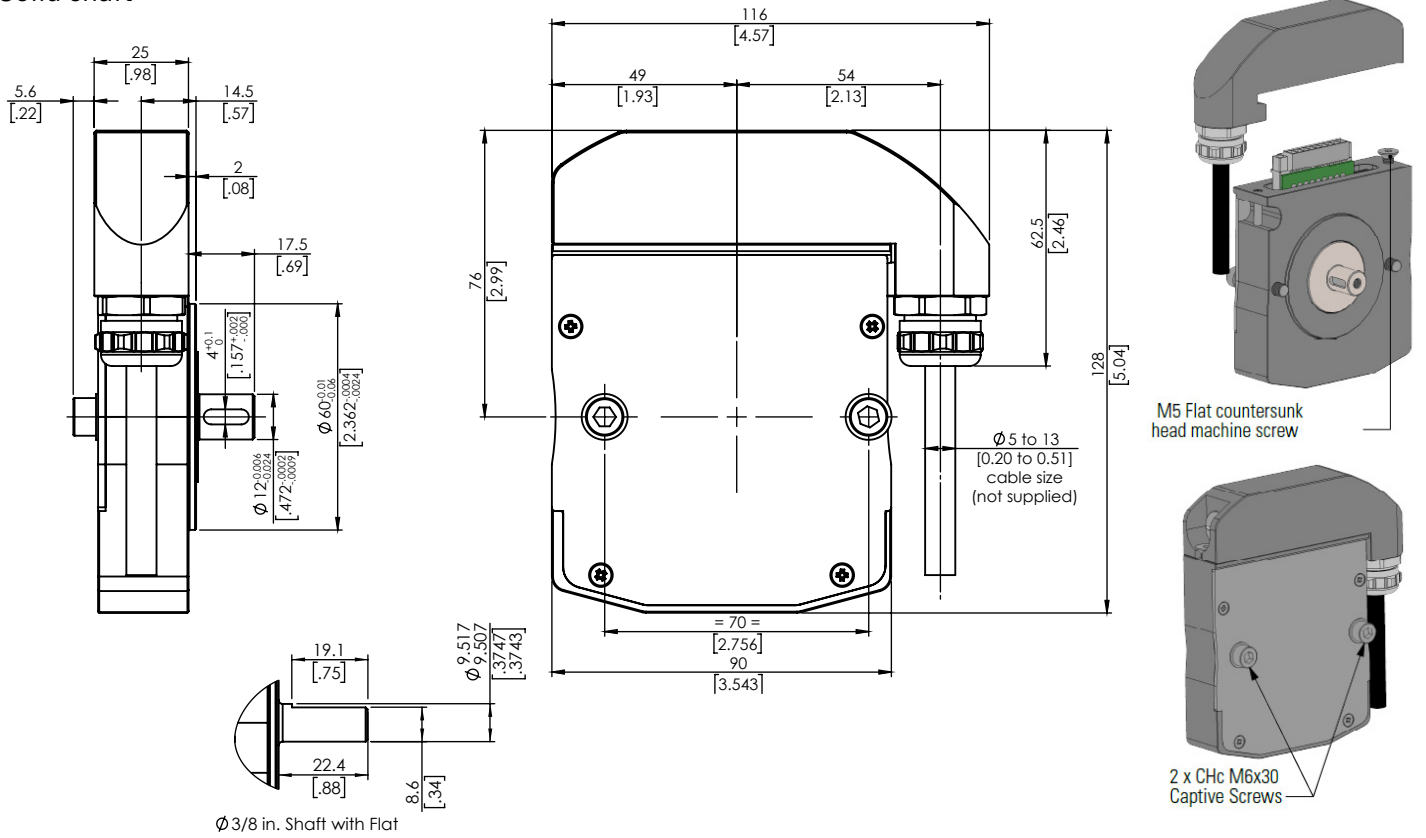

TETHER OPTIONS FOR STANDARD CABLE OR M12 CONNECTOR

Other options available, consult factory. Tethers come with all the hardware shown.

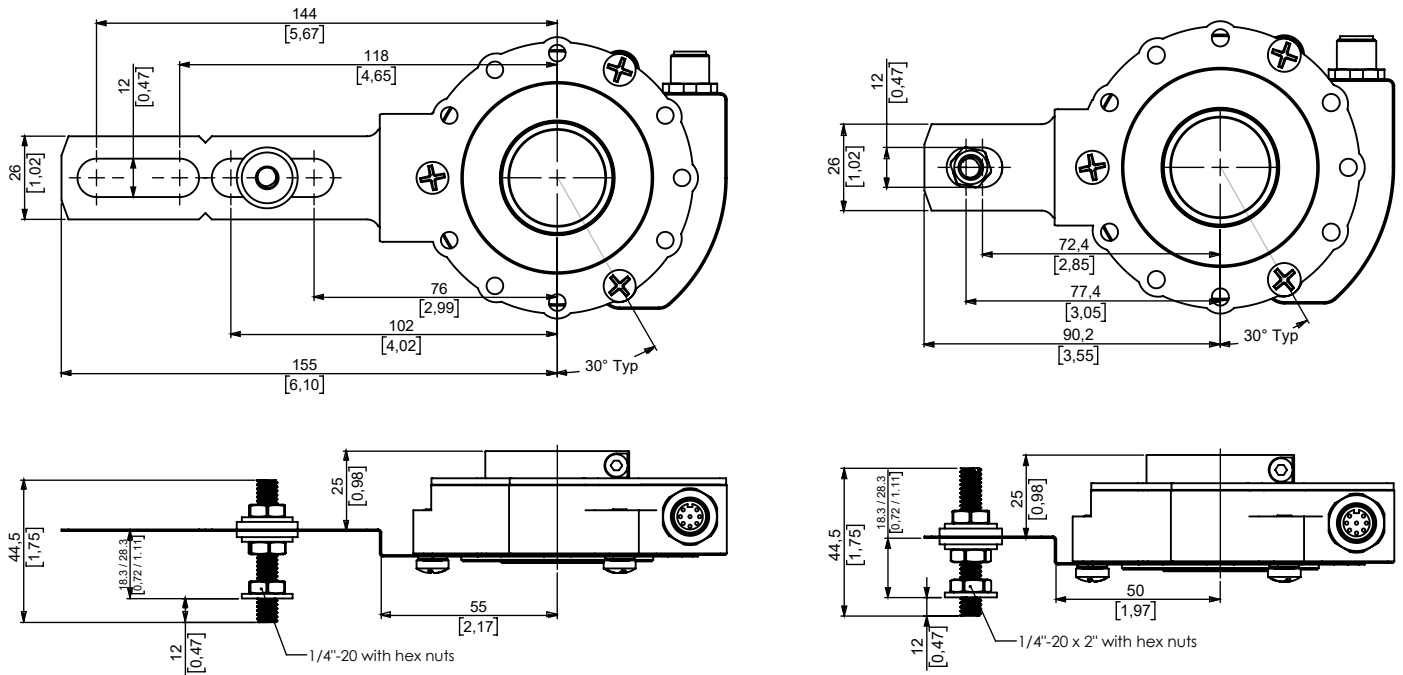


T2- Long tether arm with 1/4" -20 adj. hardware – M9445/053-02

T3-Short tether arm with 1/4" -20 adj. hardware (fits 56C) – M9445/058-02



TETHER OPTIONS FOR TERMINAL BOX OUTPUT

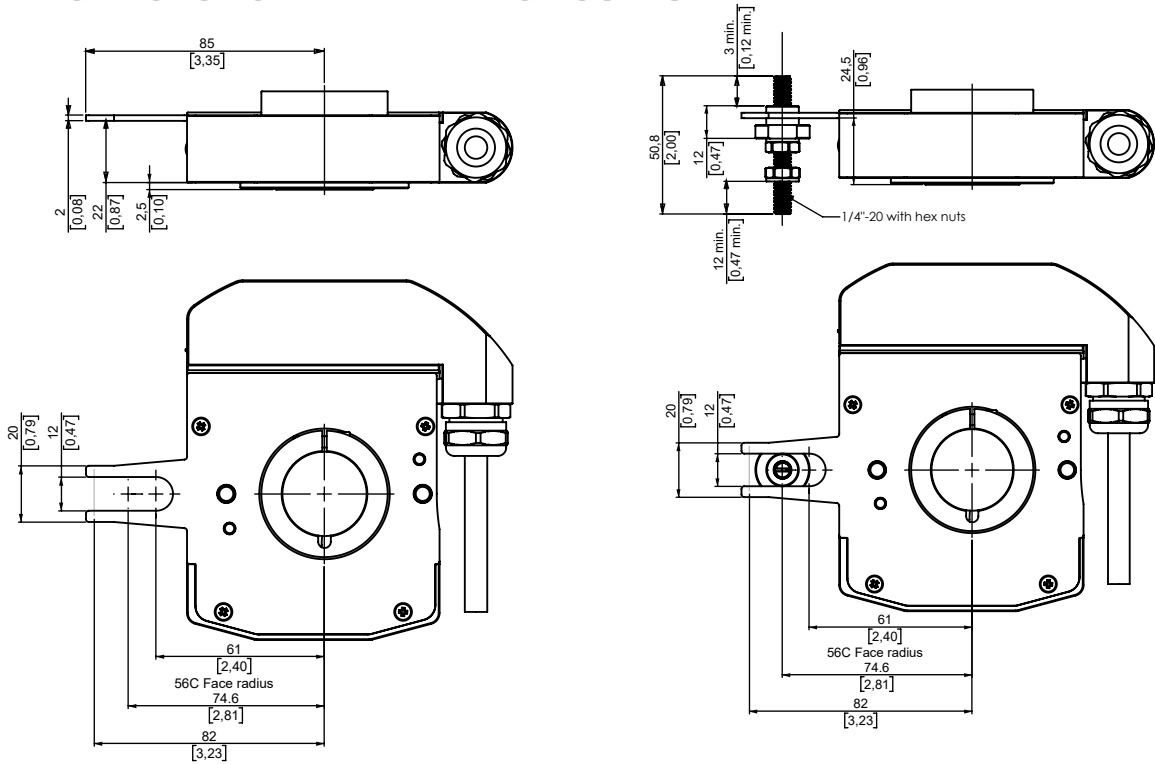

T4- Standard Fork is provided for all blind or through hollow shaft versions

T5- M9445/059-02 Standard Fork + 56C Face Pin



TERMINATIONS

Connection Incremental

Termination	Connection Ordering Code	Description	-	+	A	B	Z	A/	B/	Z/	Case Ground
M12	M12	EUR M12 - 8 pins	1	2	3	4	5	6	7	8	Connector Body
Standard Cable	SG	PVC Jacket	BLK	RED	YEL	BLU	ORN	WHT/ YEL	WHT/ BLU	WHT/ ORN	GRN
Terminal Box	T	Terminal box - 9 pins	1	2	3	4	5	6	7	8	9

Other cable types available- Consult factory

Connection Absolute SSI

Termination	Connection Ordering Code	Description	-	+	Clk+	Clk-	Data+	Data-	Reset	NC	Case Ground
M12	M12	EUR M12 - 8 pins	1	2	3	4	5	6	7	N/A	Connector Body
Standard Cable	SG	PVC Jacket	BLK	RED	BLU	WHT/ BLU	YEL	WHT/ YEL	ORN	N/A	GRN
Terminal Box	T	Terminal box - 9 pins	1	2	3	4	5	6	7	8	9



STANDARD RESOLUTIONS

Incremental

32	64	100	128	250	256	360	500	512
600	720	1000	1024	1200	1250	1440	1500	2000
2048	2500	2880	3600	4096	5000	7200	8192	10000

Absolute


BITS	5	6	7	8	9	10	11	12	13	14	15	16
Counts	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536

For non-standard and resolutions above 10000 PPR, please contact factory



ORDERING OPTIONS - NORTH AMERICAN LP35 MODELS

Use this diagram, working from left to right to construct your model number
(Example : LP35-HN-Q28-Q2048-H30S-28/V-SG060- T0)

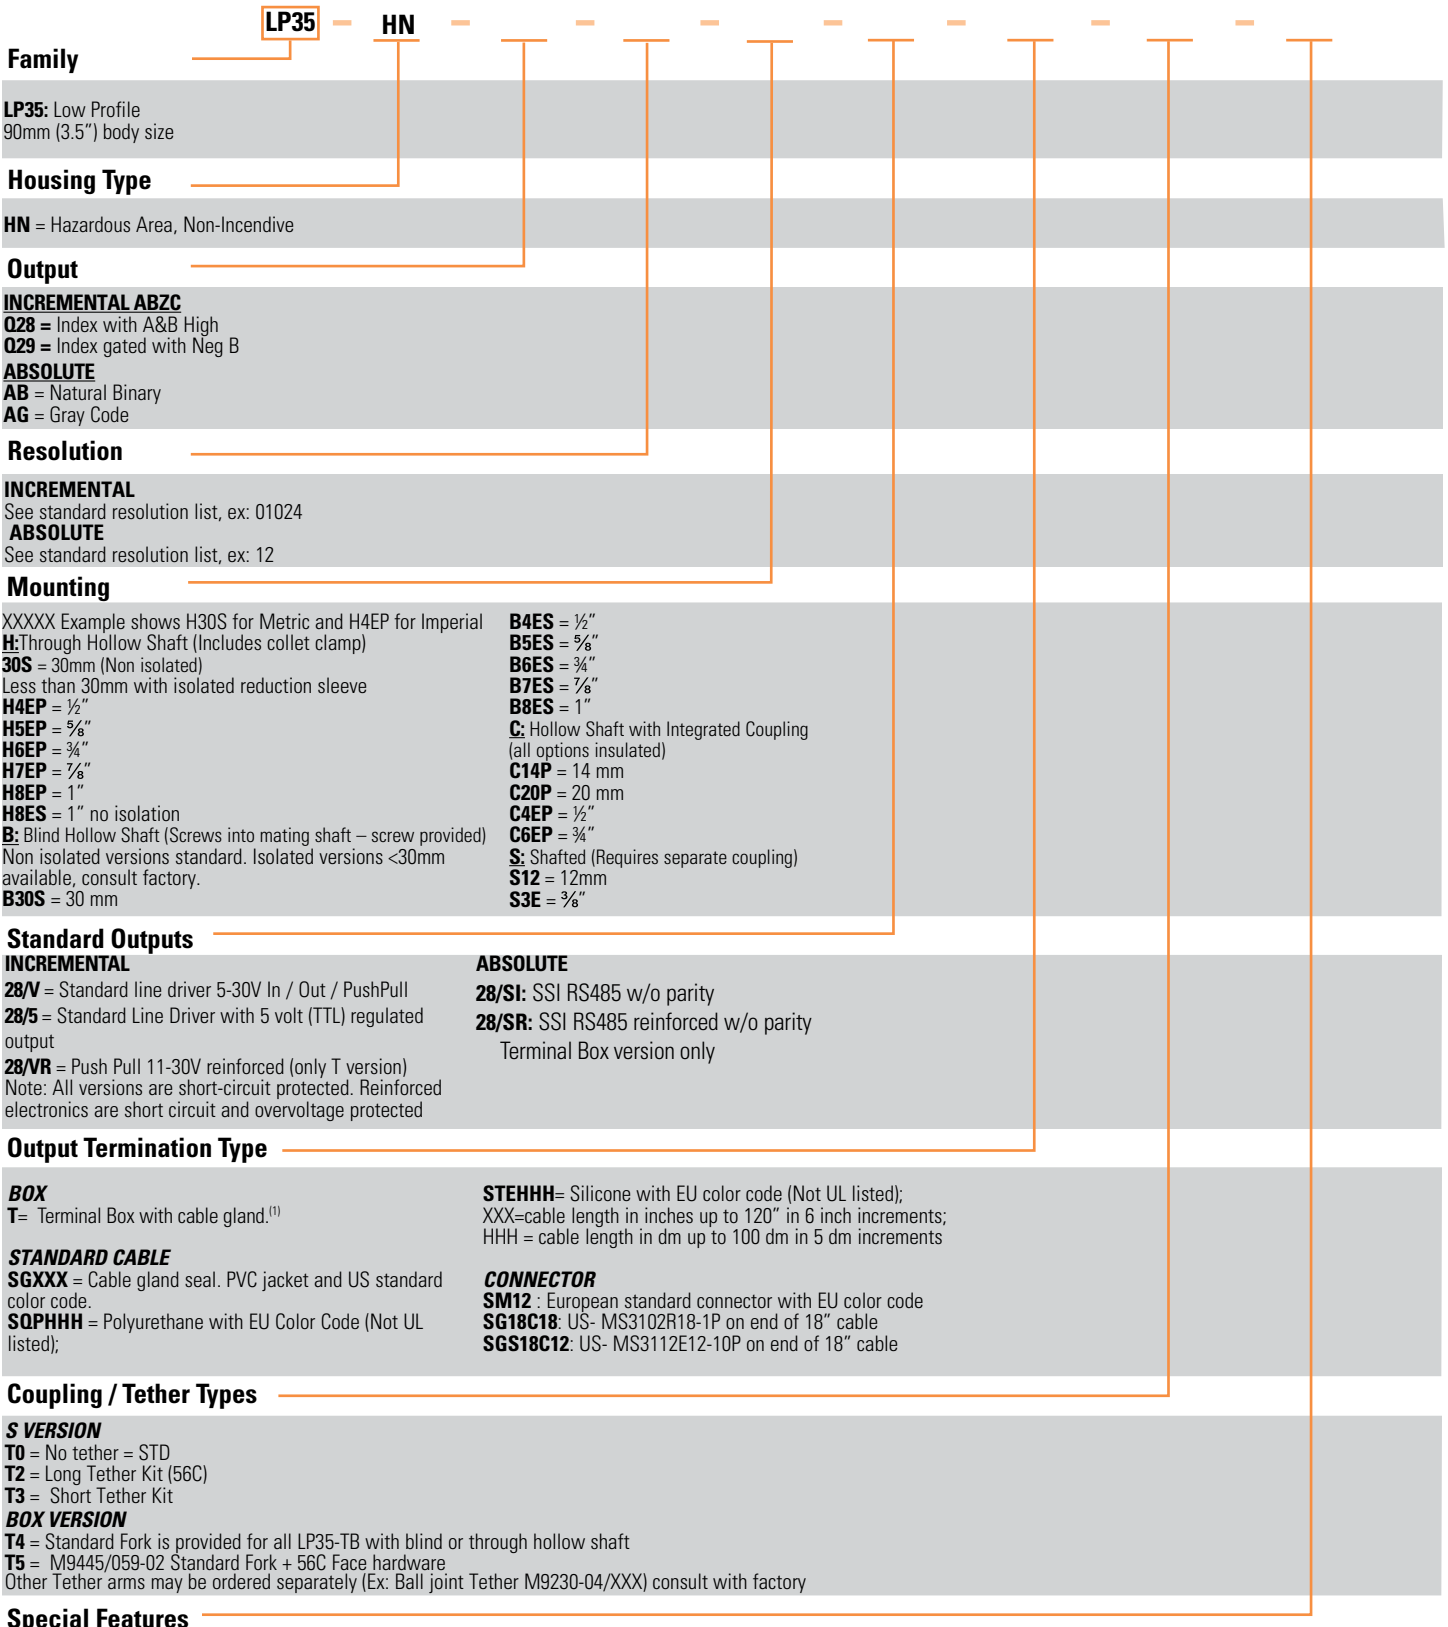

NOTE: ⁽¹⁾"T" Code changes the form from approximately 90mm (3.5") round to a rectangle that is approximately 128mm (5") high by 116mm wide (4.5")

AGENCY APPROVALS & CERTIFICATIONS

RU us Class I, Div. 2, Gps A,B,C & D

IEC **IECEx**
Ex nA IIC T4 Gc

These commodities, technology or software if exported from the United States must be in accordance with the Bureau of Industry and Security, Export Administration regulations. Diversion contrary to U.S. Law is prohibited.

CE 2004 / 108 / CE **Ex** Cenelec II 3 G Ex nA IIC T4 Gc








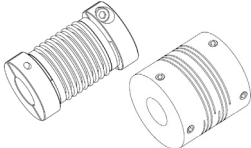

DEMKO 17 ATEX 1877X
IECEx UL 17.0043X

GENERAL NOTES

- (A) For detailed installation instructions and recommend screw torques refer to the User's Manual
- (B) For more information refer to the User Manual

ACCESSORIES

The following accessories are included with your LP series encoder as defined by your part number selection.

<p>Bore Reduction Sleeve</p> 	<p>9418/H20 = 20 mm bore 9418/H8E = 1 in. bore 9418/H7E = 7/8 in. bore 9418/H6E = 3/4 in. bore 9418/H5E = 5/8 in. bore 9418/H4E = 1/2 in. bore 9418/H3E = 2/8 in. bore</p>	<p>Key for 12mm slot</p> 	<p>9435/006 = 4X4X12 mm key</p>																		
<p>Integrated Coupling Kit (includes flex, hub and set screws)</p> 	<p>M9410/009-14 = 14 mm M9410/009-20 = 20 mm M9410/009-E3 = 1/4 in. M9410/009-E4 = 1/2 in. M9410/009-E5 = 5/8 in. M9410/009-E6 = 1 in.</p>	<p>Cable Assemblies</p> 	<table border="1"> <thead> <tr> <th>Length</th> <th>Model Number</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>0.5m</td> <td>9416/111-8230/200-GM-005</td> <td>RAL-005-002</td> </tr> <tr> <td>1m</td> <td>9416/111-8230/200-GM-010</td> <td>RAL-010-012</td> </tr> <tr> <td>2m</td> <td>9416/111-8230/200-GM-020</td> <td>RAL-020-035</td> </tr> <tr> <td>5m</td> <td>9416/111-8230/200-GM-050</td> <td>RAL-050-045</td> </tr> <tr> <td>10m</td> <td>9416/111-8230/200-GM-100</td> <td>RAL-100-047</td> </tr> </tbody> </table>	Length	Model Number	Part Number	0.5m	9416/111-8230/200-GM-005	RAL-005-002	1m	9416/111-8230/200-GM-010	RAL-010-012	2m	9416/111-8230/200-GM-020	RAL-020-035	5m	9416/111-8230/200-GM-050	RAL-050-045	10m	9416/111-8230/200-GM-100	RAL-100-047
Length	Model Number	Part Number																			
0.5m	9416/111-8230/200-GM-005	RAL-005-002																			
1m	9416/111-8230/200-GM-010	RAL-010-012																			
2m	9416/111-8230/200-GM-020	RAL-020-035																			
5m	9416/111-8230/200-GM-050	RAL-050-045																			
10m	9416/111-8230/200-GM-100	RAL-100-047																			
<p>Long Tether Arm Kit</p> 	<p>M9445/053 = long tether, M8x1 rod M9445/053-01 = long tether, 3/8"-16 rod M9445/053-02 = long tether, 1/4"-20 rod</p>	<p>Ball End Tether</p> 	<p>M9230-04/XXX (XXX=Center-to-center nominal distance in mm)</p>																		
<p>Short Tether Arm Kit</p> 	<p>M9455/058 = short tether, M8x1 rod M9455/058-01 = short tether, 3/8"-16 rod M9445/058-02 = short tether, 1/4"-20 rod</p>	<p>Flexible Couplings</p> 	<p>Bellows Type 9404/S/12-12 = for use with a 12mm shaft</p> <p>Triple Beam Type 39074-12-12 = for use with a 3/8" shaft</p>																		
<p>Tether Pin Kit</p> 	<p>M9445/059 = M10x1.5 rod and hardware M9445/059-01 = 3/8"-16 rod and hardware M9445/059-02 = 1/4"-20 rod and hardware</p>																				

Accompanying the spec is a control drawing. This is specific for the Non-Incendive products from the LP35 family and consist of Installation Requirements, Special Conditions of Operation and a Certificate of Conformity. In these documents, the LP series models are referred to as HH_9, AH_9, HH_B, AH_B or HX_9, AX_9, HX_B, AX_B. Despite the difference in nomenclature, these are the same product specified under the LP35 nomenclature. Both the LP35 and the AH, HH, AX or HX model numbers will appear on the label of the finished product.

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements, and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Americas

+1 (800) 350 2727 – Option 1
sales.beisensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080
position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006
ext 2808

BEI SENSORS UL – ATEX – IECEx certified **LP Series**

Nonincendive Magnetic Encoder Models : HH_9/AH_9/ HH_B/AH_B

HX_9/AX_9/HX_B/AX_B **CE**

SPECIAL CONDITIONS FOR SAFE USE

- The equipment shall be installed in an enclosure that provides a degree of protection not less than IP54 in accordance with IEC/EN 60079-15.
- Provision must be made to prevent the rated voltage being exceeded by transients of more than 140%. Power with (NEC) Class 2 supply.
- Encoders are intended to be used in an area of not more than pollution degree 2

ASSEMBLY CAUTION: DO NOT OPEN WHEN ENERGIZED

- For electrical installation use the standard EN/IEC 60079-14.
- For maintenance, use the standard EN 60079-17.
- The encoder must be returned to the manufacturer for repair or service. The unit is factory sealed and there are no adjustments or maintenance required.
- Electrical Ratings: 4.75-30Vdc, 7.6VA max

EU Declaration of Conformity

- BEI Sensors, certifies that non-sparking Models **HH_9, HX_9, AH_9, AX_9, HH_B, HX_B, AH_B** and **AX_B** and all resolutions, channel and output type options as noted on the IECEx and DEMKO certificates cited below,
- With the following inscriptions: **Ex II 3 G Ex nA IIC T4 Gc**
- Designed and manufactured to comply with these directives: **ATEX: 2014/34/EU and EMC: 2014/30/EU**
- Complies with these standards:
ATEX: EN60079-0:2018, EN60079-15:2010,
IECEx: IEC60079-0:2017, IEC60079-15:2010
A comparative study of the standards EN 60079-0 (2012+A11 2013 and 2018), shows that the product is not concerned by the substantial modifications.
- As detailed in EC type examination certificates: **DEMKO 17 ATEX 1877X and IECEx UL 17.0043X**
Product Quality Assurance Notification: **LCIE 03 ATEX Q8060**
Product Quality Assurance Report: **FR/LCI/QAR08.0002**
- The following standards were also investigated for this certification: EN 60-529, NFC 23-520, NFC 23-539, EN 50081-1, EN 55022 classe B, EN 55014, EN 61000-6-2, CEI 61000-4-2, CEI 61000-4-3, CEI61000-4-4, CEI 61000-4-5, CEI 61000-4-6, CEI 61000-4-8, CEI 61000-4-11
- The notified organization responsible for the follow-up of the ATEX directive is (assessed by):
LCIE, B.P.8, F92260 Fontenay-aux-Roses
Identification No. 0081
- The company in charge of certification CEM is:
LCIE BUREAU VERITAS,
Aire de la Thur 68840 Pulversheim

UL Declaration of Conformity

Models HH_9, HX_9, AH_9, AX_9, HH_B, HX_B, AH_B and **AX_B** non-sparking/nonincendive variations are recognized components which comply with the following standards as defined in UL File E78446, Vol. 4 and shall be marked: **Class I, Div. 2, Groups A,B,C,D** and **-40°C to +85° and T4**

- UL 121201, 9th Edition, Rev 2017-09-15, Nonincendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations
- UL 508, 17th Ed., Rev. 2010-04-15, Industrial Control Equipment
- CSA C22.2 No. 213-17, 3rd Edition, Sept-2017, Nonincendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations
- CAN/CSA C22.2 No. 14-10, 11th Ed., Rev. 2011-08-01, Industrial Control Equipment
- The notified organization responsible for the follow-up inspections for this UL recognized product is (assessed by):
UL International (France) SA
Espace Technologique de Saint-Aubin, Immeuble Explorer
Route de l'Orme des Merisiers – F-91190 SAINT AUBIN
Identification No. 675

BEI SENSORS Europe

9, rue de Copenhague
Espace Européen de l'Entreprise-Schiltigheim
BP 70044 - 67013 STRASBOURG Cedex France
Tel: +33 (0)3-88-20-80-80 | Fax: +33 (0)3-88-20-87-87
email: info@beisensors.com

BEI SENSORS North America

1461 Lawrence Dr | Thousand Oaks, CA 91320 USA
Tel: 800-350-2727 or 805-716-0322
Fax: 800-960-2726 or 805-968-3154
email: beisales@beisensors.com
www.beisensors.com