

ATEX ABSOLUTE MULTITURN SSI ENCODER, PEUX RANGE

ATEX certified Explosion-proof encoders

Explosion-proof rotary encoders for hazardous environments gas & dust.
 Robust design for heavy-duty applications.
 Hollow through shaft up to 30mm.
 Application fields: explosive atmospheres.


LCIE ATEX & IECEx approved

I M2
 Ex d I Mb



PEUX / PAUX version is also available with II 2 GD certification: consult us.

PEUX DIMENSIONS

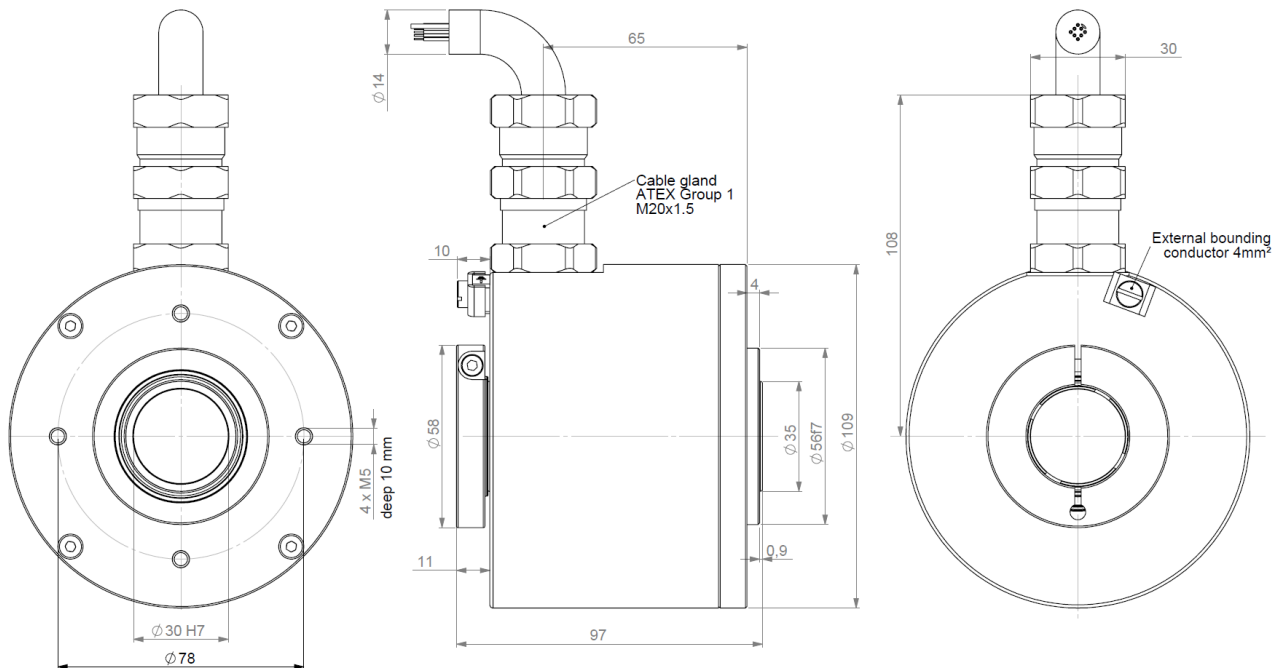

Material	Cover: aluminum
Stainless steel option	Body: aluminum
Shaft	Stainless steel
Bearings	Ball bearings
Maximal load	Axial : 50 N
	Radial : 80 N
Shaft Inertia	$\leq 50 \cdot 10^{-6} \text{ kg} \cdot \text{m}^2$
Torque	$\leq 25 \cdot 10^{-3} \text{ N} \cdot \text{m}$
Permissible max. speed	4 500 min ⁻¹
Continuous max speed	3 000 min ⁻¹
Shaft seal	Nitril
Shock (EN60068-2-27)	$\leq 300 \text{ m} \cdot \text{s}^{-2}$ (during 6 ms)

Vibration (EN60068-2-6)	$\leq 100 \text{ m} \cdot \text{s}^{-2}$ (10 ... 500 Hz)
EMC	EN 61000-6-4, EN 61000-6-2
Isolation	500 V (1 min)
Weight	2kg aluminium body & cover
	5kg stainless steel body & cover
Operating temperature	- 20... + 80 °C (encoder T°)
Storage temperature	- 20... + 80 °C
Protection(EN 60529)	IP 65
Torque (ring pressure screw)	nominal: 3N.m, break: 4N.m
Theoretical mechanical lifetime 10 ⁹ turns (F _{axial} / F _{radial})	
25 N / 40 N	140
50 N / 80 N	17

T _{amb}	Temperature class for gas atmosphere	Temperature class for dust atmosphere
-20°C ≤ Ta ≤ +40°C	T6	T80°C
-20°C ≤ Ta ≤ +55°C	T5	T95°C
-20°C ≤ Ta ≤ +60°C	T4	T100°C
-40°C ≤ Ta ≤ +70°C	T4	T110°C




ATEX ABSOLUTE MULTITURN SSI ENCODER, PEUX RANGE

ELECTRICAL CHARACTERISTIC

Input signal clock CLK	per opto-coupler
Output signal DATA	line - driver RS422
Clock frequency CLK	100kHz – 500kHz
Precision	± 1/2 LSB (13 bits)

Power supply	5 – 30Vdc
Introduction	< 1 s
Cons. without load	< 100mA (typically 50-60mA at 24Vdc)
Position refresh	< 200µs

SSI TRANSMISSION

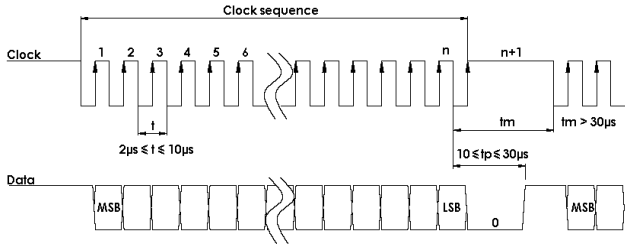

Transmission	Transmission up to 400m* at 100kHz in function of the cable characteristics
Cable	High security of transmission by using shielded cable and twisted pairs


*Consult us for length > 100m

SSI CONNECTION


Type	Vcc	Gnd	Clk+	Data+	RAZ	Data-	Clk-	DIRECTION
S5	BN/GN Brown/Green	WH/GN White/Green	GN Green	GY Grey	BU Blue	PK Pink	BN Brown	WH White

Note : Do not connect other pinouts, connect DIRECTION and RAZ to a potential (RAZ at 0V if not used)


Data output RS422




Isolated Clk input



DIRECTION input



RAZ / RAX input

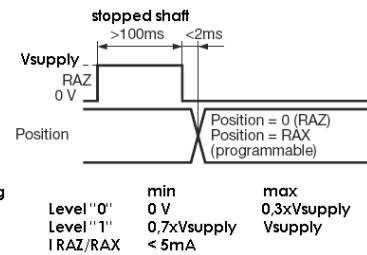

ORDERING CODE

	Shaft Ø	Supply	Output stage	Code	Resolution Number of turns	Connection	Connection Orientation
PEUX (stainless steel) PAUX (aluminium)	30:30 mm	P : 5-30Vdc	SS : SSI without parity SP : SSI with even parity SI : SSI with odd parity	B : Binary G : Gray	13B12D5 : Resolution : 13 bits Number of turns : 12 bits D5: 25bits frame	S5: PUR cable	Example : R030 : radial cable 3m
PEUX	30 //	P	SS	G //	13 B12 D5	// S5	R030

SPECIAL CONDITIONS FOR SAFE USE

The gaps of the different flamepath are less than the values specified in the tables of the IEC 60079-1 standard. The width of the different flameproof joints are superior to these specified in tables of IEC 60079-1 standard.

ASSEMBLY CAUTION

NEVER OPEN THE ENCODER NEVER CONNECT/DISCONNECT UNDER POWER SUPPLY/IN PRESENCE OF DUSTS ATMOSPHERE

For electrical installation use the standard EN/IEC 60079-14.

The customer obliges to take up and to use our products, according to our specifications and to the manners of the profession. Our company would not be responsible for any defect resulting from a defective or erroneous assembly. From a use superior to the standard, or in abnormal conditions. The breakdowns resultant of shocks, bad electric supply, put in low capacity or overcapacity of the product, the environment of bad conditions (humidity, projection, dust, etc) cannot be imputed to us. The converter doesn't require any maintenance. Any encoder presenting a dysfunction will have to be the object of immediate return for control in our facilities. The encoder mustn't be open in any case (cable gland and/or cover)

An earth situated on the cover must be linked with the ground of the installation

Made in FRANCE

ATEX ABSOLUTE MULTITURN SSI ENCODER, PEUX RANGE

1) Déclaration UE de conformité

2) Nous, société BEI Sensors, certifions que ce matériel : capteurs antidéflagrants, type

CEUX, GEUX, NEUX, PEUX

3) Avec les inscriptions suivantes :

 **I M2**

Ex d I Mb

A été conçu et fabriqué conformément à la directive applicable suivante :

ATEX : 2014/34/UE

CEM : 2014/30/UE

4) La certification a été obtenu grâce à l'application des normes suivantes :

(*) ATEX: EN60079-0:2012+A11:2013, EN60079-31:2014 et EN60079-1:2014

IECEX: IEC60079-0:2011+IS1 2013, IEC60079-1:2014, IEC60079-31:2013

(*) Une étude comparative des normes EN 60079-0 (2009 et 2012+A11 2013), EN 60079-31 (2009 et 2014) et EN 60079-1 (2007 et 2014) montre que le matériel n'est pas concerné par les modifications substantielles.

5) Une attestation d'examen CE de type a été obtenu :

LCIE 03 ATEX 6407

et une notification :

LCIE 03 ATEX Q8060

6) Un certificat de conformité IECEx a été obtenu :

IECEX LCIE 13.0030X

et une notification :

FR/LCI/QAR08.0002

7) L'application des normes suivantes a participé à l'obtention de la certification :

EN 60-529, NFC 23-520, NFC 23-539, EN 50081-1, EN 55022 classe B, EN 55014, EN 61000-6-2, CEI 61000-4-2, CEI 61000-4-3, CEI61000-4-4, CEI 61000-4-5, CEI 61000-4-6, CEI 61000-4-8, CEI 61000-4-11

8) L'organisme notifié responsable du suivi de la directive **ATEX** est le

LCIE,B.P.8, F92260 Fontenay-aux-Roses

Numéro d'identification : 0081

9) La société chargée de la certification **CEM** est nommée ci-après :

GRME, Cellule CEM, B.P.8, 68840 Pulversheim

10) Nous certifions que nos produits désignés ci-dessus sont conformes à la directive et aux normes spécifiées

1) EU Declaration of conformity

2) We, BEI Sensors, certify that this material : sensor explosion-proof standard

CEUX, GEUX, NEUX, PEUX

3) With the following inscriptions :

 **I M2**

Ex d I Mb

Conceived and manufactured has the directive applicable following :

ATEX : 2014/34/EU

EMC: 2014/30/EU

4) Certification to summer obtained thanks to the application of the standards :

(*) ATEX: EN60079-0:2012+A11:2013, EN60079-31:2014 and EN60079-1:2014

IECEX: IEC60079-0:2011+IS1 2013, IEC60079-1:2014, IEC60079-31:2013

(*) A comparative study of the standards EN 60079-0 (2009 and 2012+A11 2013), EN 60079-31 (2009 and 2014) and EN 60079-1 (2007 and 2014) shows that the product is not concerned by the substantial modifications.

5) EC type examination certificate was obtained :

LCIE 03 ATEX 6407

and a notification :

LCIE 03 ATEX Q8060

6) IECEx certificate of conformity was obtained :

IECEX LCIE 13.0030X

and a notification :

FR/LCI/QAR08.0002

7) The application of the following standards took part in obtaining certification :

EN 60-529, NFC 23-520, NFC 23-539, EN 50081-1, EN 55022 classe B, EN 55014, EN 61000-6-2, CEI 61000-4-2, CEI 61000-4-3, CEI61000-4-4, CEI 61000-4-5, CEI 61000-4-6, CEI 61000-4-8, CEI 61000-4-11

8) The notified organization responsible for the follow-up of the directive **ATEX** is the

LCIE,B.P.8, F92260 Fontenay-aux-Roses

Identification number : 0081

9) The company in charge of certification **CEM** is named :

GRME, Cellule CEM, B.P.8, 68840 Pulversheim

10) We certify that our indicated products so above are in conformity with the directive and the specified standards

Date :

ATEX Certified Product Approved Person
Jean-Marc HUBSCH



Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates (“Sensata”) are solely intended to assist third parties (“Buyers”) who are developing systems that incorporate Sensata products (also referred to herein as “components”). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer’s systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED “AS IS”. SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata’s terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS’ PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Regional head offices:

United States of America

Sensata Technologies

Attleboro, MA

Phone: 508-236-3800

E-mail: support@sensata.com

Netherlands

Sensata Technologies Holland B.V.

Hengelo

Phone: +31 74 357 8000

E-mail: support@sensata.com

China

Sensata Technologies China Co., Ltd.

Shanghai

Phone: +8621 2306 1500

E-mail: support@sensata.com

Copyright © 2023 Sensata Technologies, Inc.