


INCREMENTAL ENCODERS, GHTB SERIE


20 mm hollow shaft incremental encoder. Nearly indestructible, specially designed for heavy duty application (steel, paper, wood mill, cranes...). Compact and robust conception. Excellent resistance to shocks / vibrations and to extreme axial/radial loads.



GHTB_20, Binder DIN 8 pinouts connection

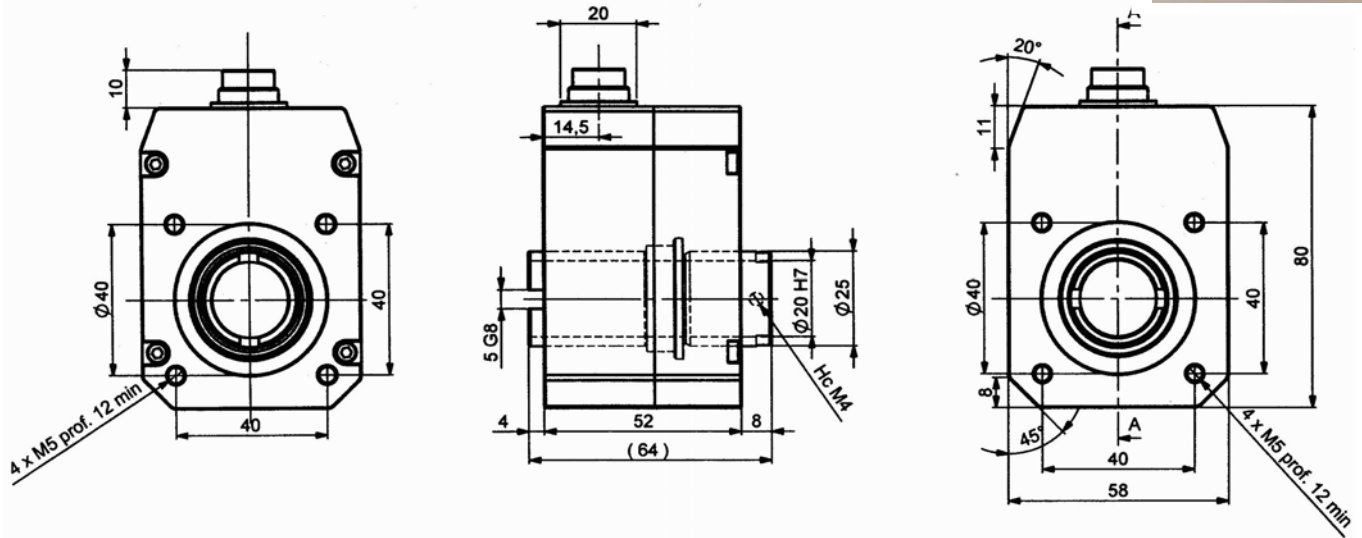


GHTB_20, M12 8 pinouts connection

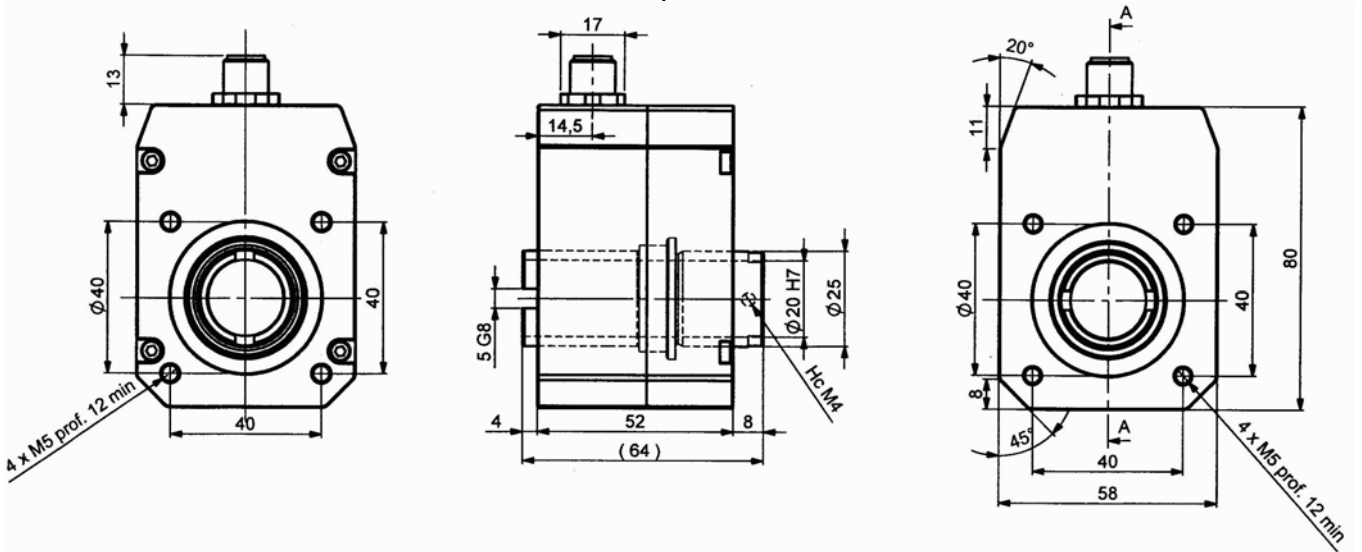

Material	Cover : aluminium	Shocks (EN60068-2-27)	≤ 30 g (during 11 ms)
Option : stainless steel	Body : aluminium	Shocks (EN60028-2-29)	≤ 10 g (during 6 ms)
Shaft	Stainless steel	Vibration (EN60068-2-6)	≤ 10 g (10 Hz...500 Hz)
Ball bearings	6500 DDU	EMC	EN 61000-6-4, EN 61000-6-2
Maximal loads	Axial : 100 N	Electric life time	> 10 ⁵ h
	Radial : 200 N	Weight	650 g
Shaft inertia	≤ 140 g.cm ²	Operating temperature	- 20... + 85 °C
Torque	≤ 2,5 N.cm	Storage temperature	- 40... + 85 °C
Maximal speed	6 000 rpm	Humidity	98 % (without condensation)
Nominal speed (continuous)	3 000 rpm	Protection(EN 60529)	IP 65
Maximal acceleration	1.10 ⁵ rad.s ⁻²	Theoretical mechanical lifetime 10 ⁹ turns (F _{axial} / F _{radial})	
Shaft seal	Nitril	25 N / 50 N: 1 090	50 N / 100 N: 135 100 N / 200 N: 17,0


INCREMENTAL ENCODERS, GHTB SERIE

OUTPUT CIRCUITS / POWER SUPPLY

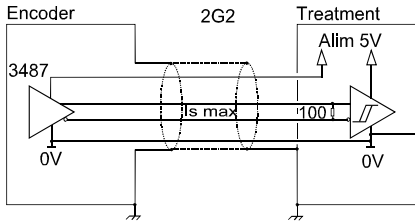


Electronics 2G2

Supply : 5Vdc \pm 10%
Consumption : 100mA
Intensity per channel : 40mA
Level 0 max : $V_{ol} = 0,5Vdc$
Level 1min : $V_{oh} = 2,5Vdc$

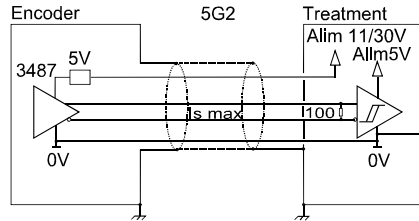

Electronics 5G2

Supply : 11 - 30Vdc
Consumption : 60mA
Intensity per channel : 40mA
Level 0 max : $V_{ol} = 0,5Vdc$
Level 1min : $V_{oh} = 2,5Vdc$

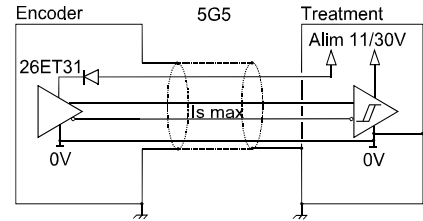

Electronics 5G5

Supply : 11 - 30Vdc
Consumption : 75mA
Intensity per channel : 50mA
Level 0 max : $V_{ol} = 1,5Vdc$
Level 1min : $V_{oh} = V_{cc}-2,5Vdc$

Protection against short circuits and against inversion of polarity for the electronic 5G5

CONNECTION

	-	+	A	B	0	A/	B/	0/	Ground
00R/OP (Binder DIN 8 pinouts) or 00R/OQ (M12, 8 pinouts)	8	1	2	4	6	3	5	7	Connector body

ORDERING REFERENCE Contact the factory for special versions (electronics, special flanges, connections, ..)

	Shaft \varnothing	Available electronics		Output channels	Resolution	Connection
GHTB	20: 20mm	2G2, 5G2, 5G5		9: A,A/,B,B/,0,0/ 0: A&B gated A: A,A/,B,B/,0,0/ 0: A gated N: A,A/,B,B/,0,0/ 0: ungated	3 600 max	00R/OP/ : Binder DIN 8 pinouts 00R/OQ/ : M12 8 pinouts
		Power supply	Output stages			
		2: 5Vdc 5: 11 - 30Vdc	G2: driver 5Vdc RS422 G5: push-pull 11-30Vdc			
Ex: GHTB_	20 //	5	G5	9 //	1 000//	00R/OP/

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates (“Sensata”) are solely intended to assist third parties (“Buyers”) who are developing systems that incorporate Sensata products (also referred to herein as “components”). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer’s systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED “AS IS”. SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata’s terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS’ PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Regional head offices:

United States of America

Sensata Technologies

Attleboro, MA

Phone: 508-236-3800

E-mail: support@sensata.com

Netherlands

Sensata Technologies Holland B.V.

Hengelo

Phone: +31 74 357 8000

E-mail: support@sensata.com

China

Sensata Technologies China Co., Ltd.

Shanghai

Phone: +8621 2306 1500

E-mail: support@sensata.com

Copyright © 2023 Sensata Technologies, Inc.