

600 SERIES

LINEAR POSITION SENSOR



Introduction

The 600 Series linear motion position transducers provide extremely accurate measurements in applications that require a rugged instrument operating in a tight area. Their long life, infinite resolution and smooth output deliver high reliability in critical measurements. Seven models provide a choice of electrical travel from 1" (25mm) to 12" (305mm) and include a floating design to accommodate shaft/interface connecting misalignments. An optional mounting bracket and rod end bearing are available.

SPECIFICATIONS

Mechanical

Mechanical Travel	Elect travel + 0.1 in. min
Actuation Force	2 oz. max
Repeatability	Within 0.0005 inch
Life	10 x 10 ⁶ cycles

Electrical

Electrical Travel	See Table 1
Resistance Range	See Table 1
Resistance Tolerance	±20%
Independent Linearity	See Table 1
Power Rating @ 70°C	0.25 Watt per inch Derated to 0 Watts @ 125°C
Output Smoothness	0.1%
Insulation Resistance @500 VDC	1000 Megohms
Resolution	Infinite
Dielectric Strength	500 VRMS
Temperature Range	-55° to +125°C

DIMENSIONS

Dimensions are in inches(mm). Tolerance: .03 (.8)

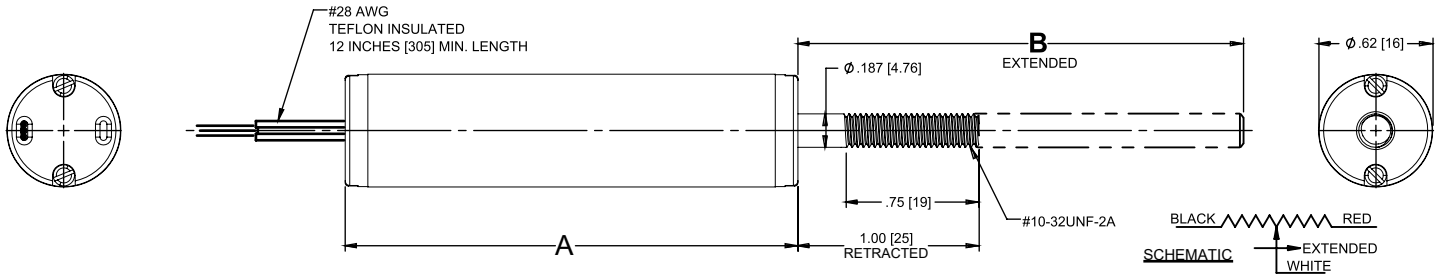


Table 1

Model	Resistance Ω	Linearity $\pm\%$	Electrical Travel	Dimensions - Inches (mm)	
				A	B
601	1.0	0.70	1.00 (25)	2.50 (64)	2.10 (53)
602	2.0	0.35	2.00 (51)	3.50 (89)	3.10 (79)
603	3.0	0.25	3.00 (76)	4.50 (114)	4.10 (104)
604	4.0	0.15	4.00 (102)	5.50 (140)	5.10 (129)
606	6.0	0.12	6.00 (152)	7.50 (190)	7.10 (180)
610	10.0	0.09	10.00 (254)	11.50 (292)	11.10 (282)
612	12.0	0.08	12.00 (305)	13.50 (343)	13.10 (333)

General Notes

- Available in dual configuration.
- Most specifications may be altered to meet specific requirements.
- Other travels available

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Americas

+1 (800) 350 2727
sensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080
position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
 China +86 (21) 2306 1500
 Japan +81 (45) 277 7117
 Korea +82 (31) 601 2004
 India +91 (80) 67920890
 Rest of Asia +886 (2) 27602006
 ext 2808