

CIRCUIT PROTECTION NEEDS IN POWER DISTRIBUTION UNITS

Challenge

The explosion of computing power around the world has translated into a continued expansion in telecom and server facilities. As technologies within these data centers continue to rapidly evolve, their power designs have as well.

Architectures in data centers have moved from 120VAC and 208/120VAC to 208VAC Delta, 230VAC and 240VAC voltage levels, with server racks housing more and more data in smaller and smaller areas.

Managing the flow of power into these are power distribution units, which are generally mounted vertically inside the IT rack enclosure. A narrow power strip package is also desired to allow improved equipment airflow cooling and cable management – creating a downstream emphasis on the size of the circuit breakers contained within.

On the performance size, interrupting capacities within that breaker also continue to increase – driven in some situations by insurers evaluating the risks associated with both the technology and server costs as well as the potential liability for the data they store.

Solution


Taken together, all of those trends have created significant demand for UL Listed circuit breakers with a 240VAC rating.

The Sensata | Airpax LEJ and LUX series are ideal for these applications. UL489 Listed, their small compact size help them achieve the narrow form factor desired in this type of equipment.



The LEJ has also been expanded to allow for current ratings up to 30A, and its 10kA interrupting capacity provides the performance needed to manage the requirements demanded by these high-value facilities. Other features of the LEJ series are also designed in a way which is an ideal fit for these datacom applications, such as rear access terminal screws for ease of assembly and wire routing in small enclosures.

The LEX series is also ideal for datacom applications, with its narrower design (39.6mm depth compared to 52.6mm standard LEJ depth) providing an even tighter footprint.



As with all Sensata | Airpax hydraulic magnetic circuit breakers, they are resistant to changes in ambient temperature, can also be designed with custom trip values to help manage the inrush currents associated with the equipment they support.



RELATED PRODUCTS

Reference on Diagram	Product	Features	Function
1	 LEJ	<ul style="list-style-type: none"> • Current ratings from 2-30A • 5kA and 10kA interrupting capacity • UL 489 listed and TÜV approvals available • Low-depth LEJA model available 	Provides circuit protection for PDU
2	 LEX	<ul style="list-style-type: none"> • 39.6mm depth • Up to 30A per pole • 5kA and 10kA interrupting capacity 	Provides circuit protection for PDU

DATACOM CENTER LAYOUT

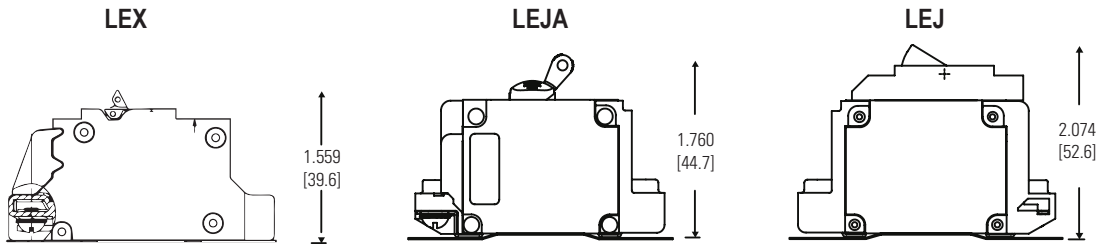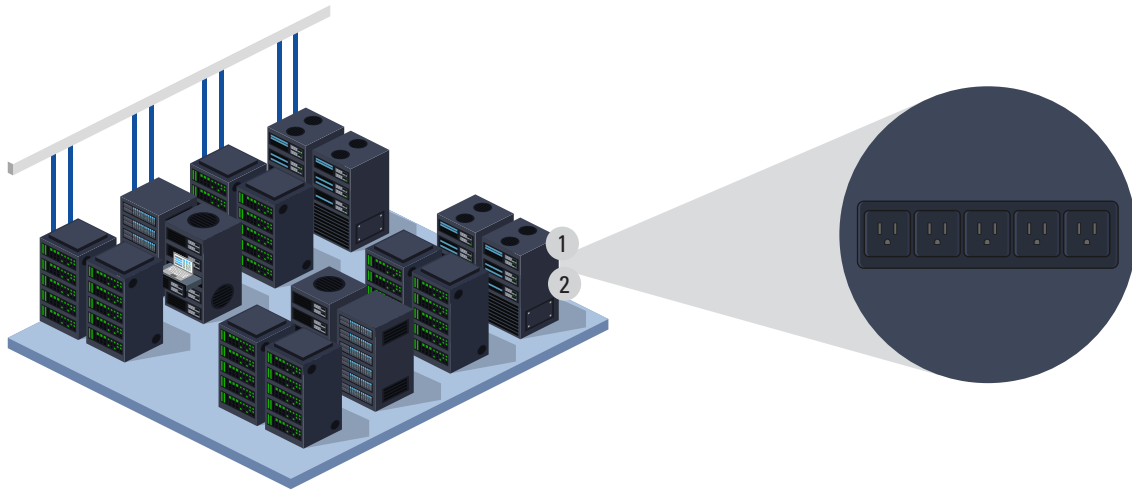

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice. Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Regional head offices:
United States of America
 Sensata Technologies
 Attleboro, MA
Phone: 508-236-3800
E-mail: support@sensata.com
Netherlands
 Sensata Technologies Holland B.V.
 Hengelo
Phone: +31 74 357 8000
E-mail: support@sensata.com
China
 Sensata Technologies China Co., Ltd.
 Shanghai
Phone: +8621 2306 1500
E-mail: support@sensata.com