



DHO5

INCREMENTAL ENCODERS, 100°C



DIGISINE™ universal encoder

- Through hollow shaft version Ø14mm, with reduction hubs in aluminum of 6, 8, 10 and 12 mm
- Easy mounting for the hollow shafts thanks to DAC (Anti-Coupling Device)
- Robustness and excellent resistance to shocks / vibrations
- High protection level IP65
- High resolutions available : up to 80 000 cpt
- Universal electronic circuits from 4.75 to 30 Vdc
- High performances in temperature -30°C to 100°C (option -40°C)
- High performances in frequency of output signals : 300 kHz



MECHANICAL CHARACTERISTICS

Material	Cover : zinc alloy
	Body : aluminum
	Shaft : stainless steel
Bearings	6 803 serie
Maximum loads	Axial : 20 N
	Radial : 50 N
Shaft inertia	$\leq 2,2 \cdot 10^{-6} \text{ kg.m}^2$
Torque	$\leq 6 \cdot 10^{-3} \text{ N.m}$
Permissible max. speed	9 000 min ⁻¹
Continuous max. speed	6 000 min ⁻¹
Shaft seal	Viton
Shocks (EN60068-2-27)	$\leq 500 \text{ m.s}^{-2}$ (during 6 ms)
Vibrations (EN60068-2-6)	$\leq 100 \text{ m.s}^{-2}$ (55 ... 2 000 Hz)
EMC	EN 50081-1, EN 61000-6-2
Isolation	1 000 V eff
Encoder weight (approx.)	0,300 kg
Operating temperature	- 30 ... + 100°C (encoder T°)
Storage temperature	- 40 ... + 100°C

Protection(EN 60529)	IP 65
Torque (ring pressure screw)	0,7...0,9 Nm
Theoretical mechanical lifetime 10⁹ turns (Faxial / Fradial)	10N / 25N : 230
	20N / 50N : 29

ELECTRICAL CHARACTERISTICS

Version	Output signals	Resolution	Operating Voltage Vcl	Supply current (no loads)	Current per channel pair	Output Levels (Is=20mA)	Frequency capability	Frequency capability Short circuits proof	Reverse polarity tolerant	Temperature range
5GT	HTL	Up to 5000	11-30V --- 250mA	75mA	40mA	High min: Vcl – 2.5V Low max: 1.5V	Up to 120kHz	Yes	Yes	-30°C +70°C ¹
RG5		See available resolutions below	4.75-30V --- 250mA			High min: Vcl – 0.5V Low max: 0.5V				
RG2	TTL RS422					5V+/-5% --- 250mA	High min : 4.5V Low max: 0.5V	Up to 300kHz		Yes (except to Vcl)
2G2		1Vpp	Up to 2500		8mA		1Vpp ± 20%			
2WT										

¹ UL listed: -20°C +70°C. Device must be supplied by a Class 2, LPS or SELV limited energy source.

² UL listed: -20°C +80°C. Device must be supplied by a Class 2, LPS or SELV limited energy source.

CONNECTIONS

		-	+	A or S	B or C	Z	A/ or S/	B/ or C/	Z/	Ground
GM	GM M12 - 8 pins	1	2	3	4	5	6	7	8	Connector Body
G6	M23 - 12 pins CW	1	2	3	4	5	6	7	8	Connector Body
G8	M23 - 12 pins CCW	10 + 11	2 + 12	8	5	3	1	6	4	Connector Body
U3	PVC cable 8 wires	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General Shielding
GC	PUR cable 8 wires	BK black	RD red	GN green	BN brown	VT violet	YE yellow	OG orange	BU blue	General Shielding
G3	PVC cable 8 wires (not UL)	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General Shielding
GP	PUR cable 12 wires (not UL)	WH white + WH/GN white/green	BU blue + BN/ GN brown/ green	GY grey	BN brown	RD red	PK pink	GN green	BK black	General Shielding
TE	Silicone cable ³ 8 wires (not UL)	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General Shielding


³ Advised cable for mobile application, in extreme temperature from -40°C to +100°C




DIMENSIONS

All dimensions are in: millimeters

DH05_14 connection G6R (radial M23), DAC 9445/015 mounted on body

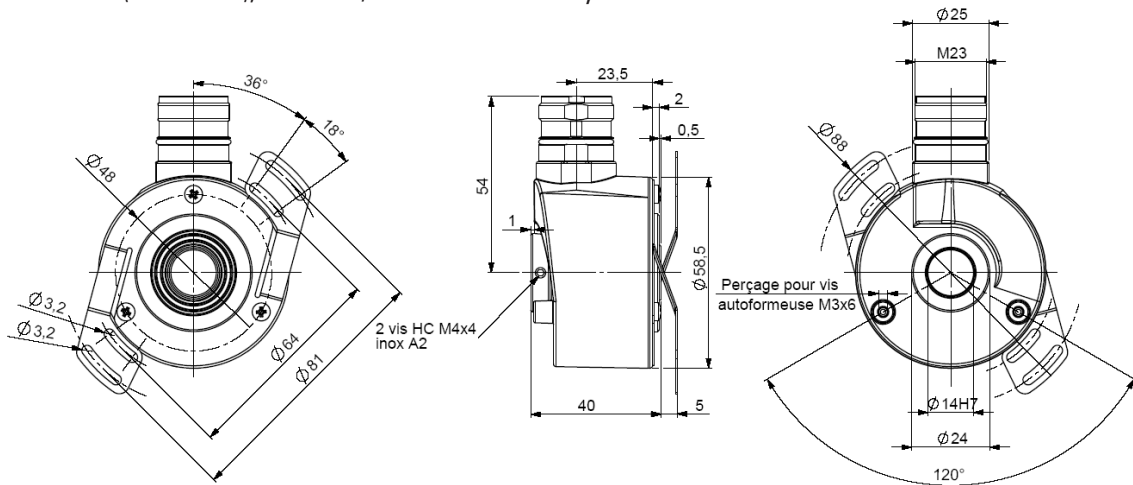

DH05_14 connection G3R (radial cable)

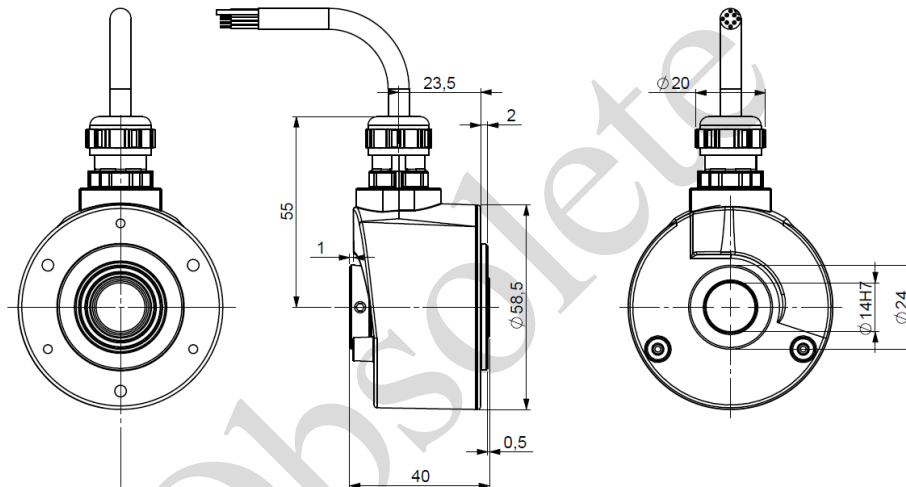

AVAILABLE RESOLUTIONS

Available resolutions digital signals: 50 60 100 120 125 127 150 180 200 240 250 256 300 314 360 375 400 500 512 600 720 750 768 800 927 1000 1024 1200 1250 1280 1440 1500 1800 2000 2048 2400 2500 3000 3600 4000 4096 5000

Interpolated available resolutions digital signals (limited to 70°C): 1080 1536 2560 2880 3072 4320 4500 5120 5400 5760 6000 6144 7200 7500 8000 8192 9000 10000 10240 10800 12000 12500 12288 14400 15000 16000 16384 18000 20000 20480 21600 24000 24576 25000 28800 30000 32000 32768 36000 40000 40960 43200 48000 49152 50000 57600 60000 64000 65536 80000


Available resolutions sine wave signals (2WT electronic): 250 256 360 500 512 1000 1024 1500 1800 2000 2048 2500



ORDERING OPTIONS

Example : DH05_14//RG59 // 01024 // G6R//**DD**

Use this diagram, working from left to right to construct your model number

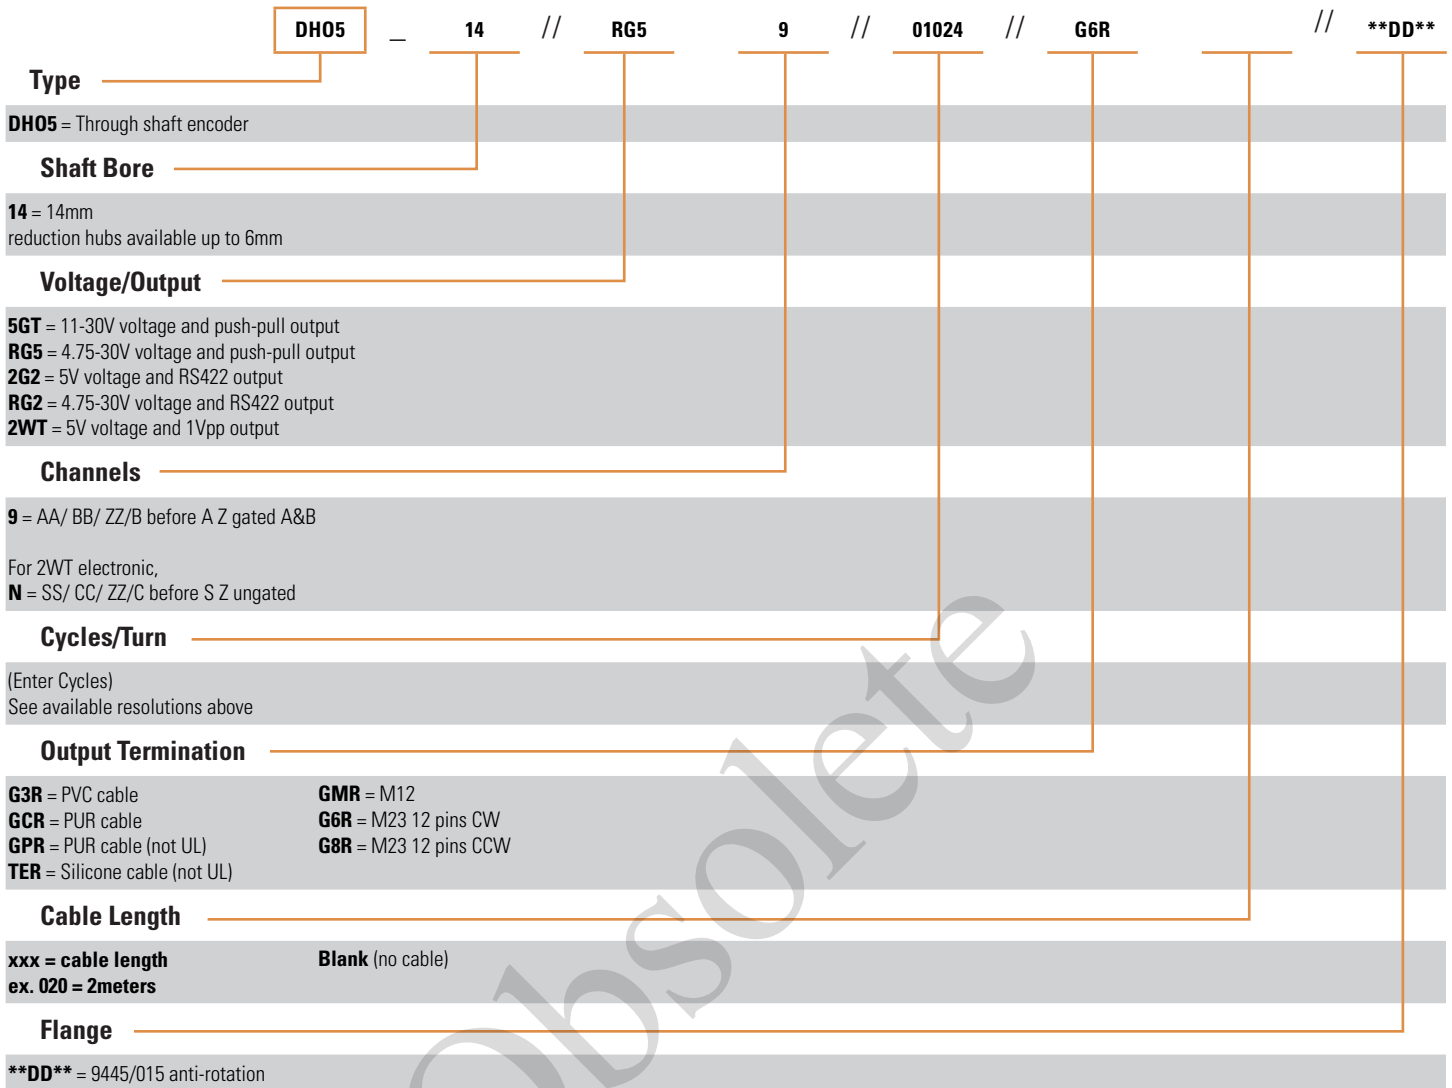

Obsolete

AGENCY APPROVALS & CERTIFICATES



Proc. Cont. Eq.
E477663

Obsolete

Made In France

Page 5

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727
sales.beisensors@sensata.com
Europe, Middle East & Africa
+33 (3) 88 20 8080
position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006
ext 2808