

USING FUNCTIONAL SAFETY TO IMPROVE PRODUCTIVITY IN FOOD PROCESSING

Background

It has always been a time consuming effort to clean up food processing equipment before switching to different products. In fact the process can sometimes take a whole shift. Part of the reason is that the equipment cannot be run at full operating speed during clean-up due to the safety hazard of having people work so near to equipment. This means that the normal process is to clean the accessible part of the machinery, step back, jog the equipment forward and then clean up the newly exposed surfaces. This process is repeated until all areas of the equipment have been cleaned. The equipment is now ready to be put back into service.

Solution

Using Functional Safety components, it is possible to operate the equipment in a slow, but safe pace during the cleaning operation. Some of the control functions that are available within the Functional Safety system include Safely-Limited Speed (SLS) and Safe Direction (SDI). Referring to our example application in the food industry, under Functional safety it is possible to have the equipment running continuously and slowly in a controlled fashion using these limitations. This allows workers to continuously clean the equipment as it moves, thereby ensuring they can access all parts of the equipment easily and efficiently. Where such systems have been used, the changeover time has been reduced to as little as two hours. The improved uptime and availability of equipment more than pays for the upgrade to a Functional Safety system.

“This allows workers to continuously clean the equipment as it moves, thereby ensuring they can access all parts of the equipment easily and efficiently.”




Food product gets a thorough cleaning at the start of processing.



This cleaning process goes smoother when the operator has access to all parts of the equipment.



RELATED PRODUCTS


Product	Type	Features	Part Number	Function	Brand
 DSM5X	Safety Encoder	<ul style="list-style-type: none"> Stainless Steel IP69K 	DSM5X Series	Rotary seed and position	BEI Sensors



GENERAL DIAGRAM



Examples of safety-critical control areas that would benefit from functional safety upgrades for maintenance operations.

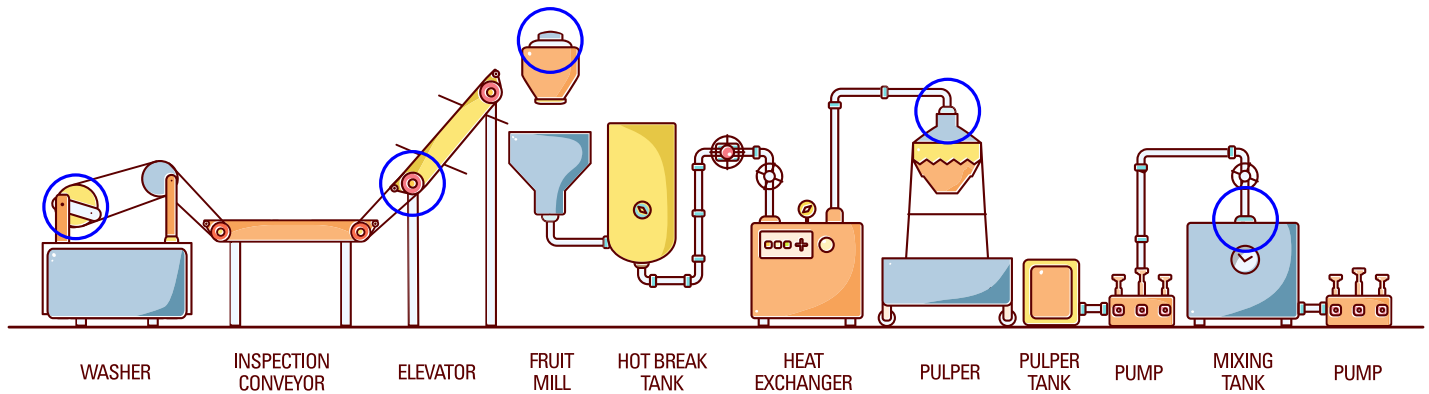

Sensata Technologies, Inc. ("Sensata") data sheets and application notes are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets and application notes have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet and application notes. Sensata may make corrections, enhancements, improvements and other changes to its data sheets and application notes or components without notice.

Buyers are authorized to use Sensata data sheets and application notes with the Sensata component(s) identified in each particular data sheet and application notes. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS AND APPLICATION NOTES ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS AND APPLICATION NOTES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS AND APPLICATION NOTES OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727 – Option 1
sales.beisensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080
position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
 China +86 (21) 2306 1500
 Japan +81 (45) 277 7117

Korea +82 (31) 601 2004
 India +91 (80) 67920890

Rest of Asia +886 (2) 27602006
 ext 2808