
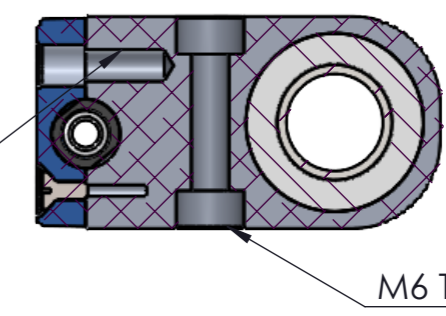

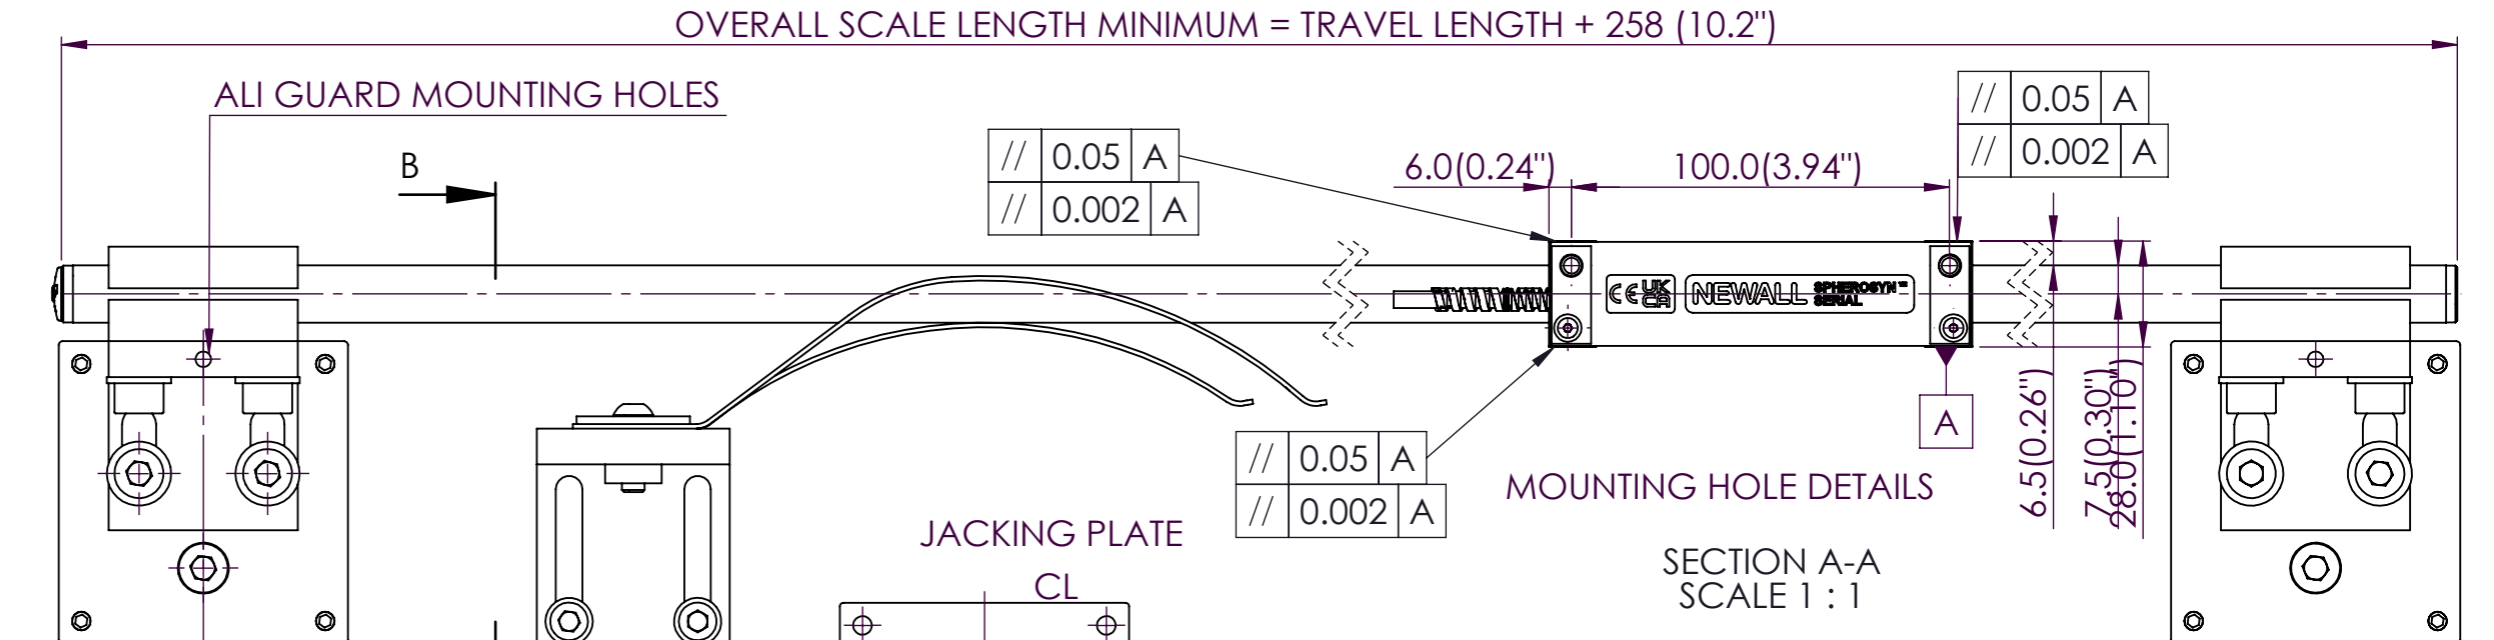


JACKING PLATE
4 OFF M6 TAPPED HOLES
2 OFF M8 TAPPED HOLES
2 OFF Ø8.5 HOLE C/BORE Ø13.5 X 8.5mm DEPTH

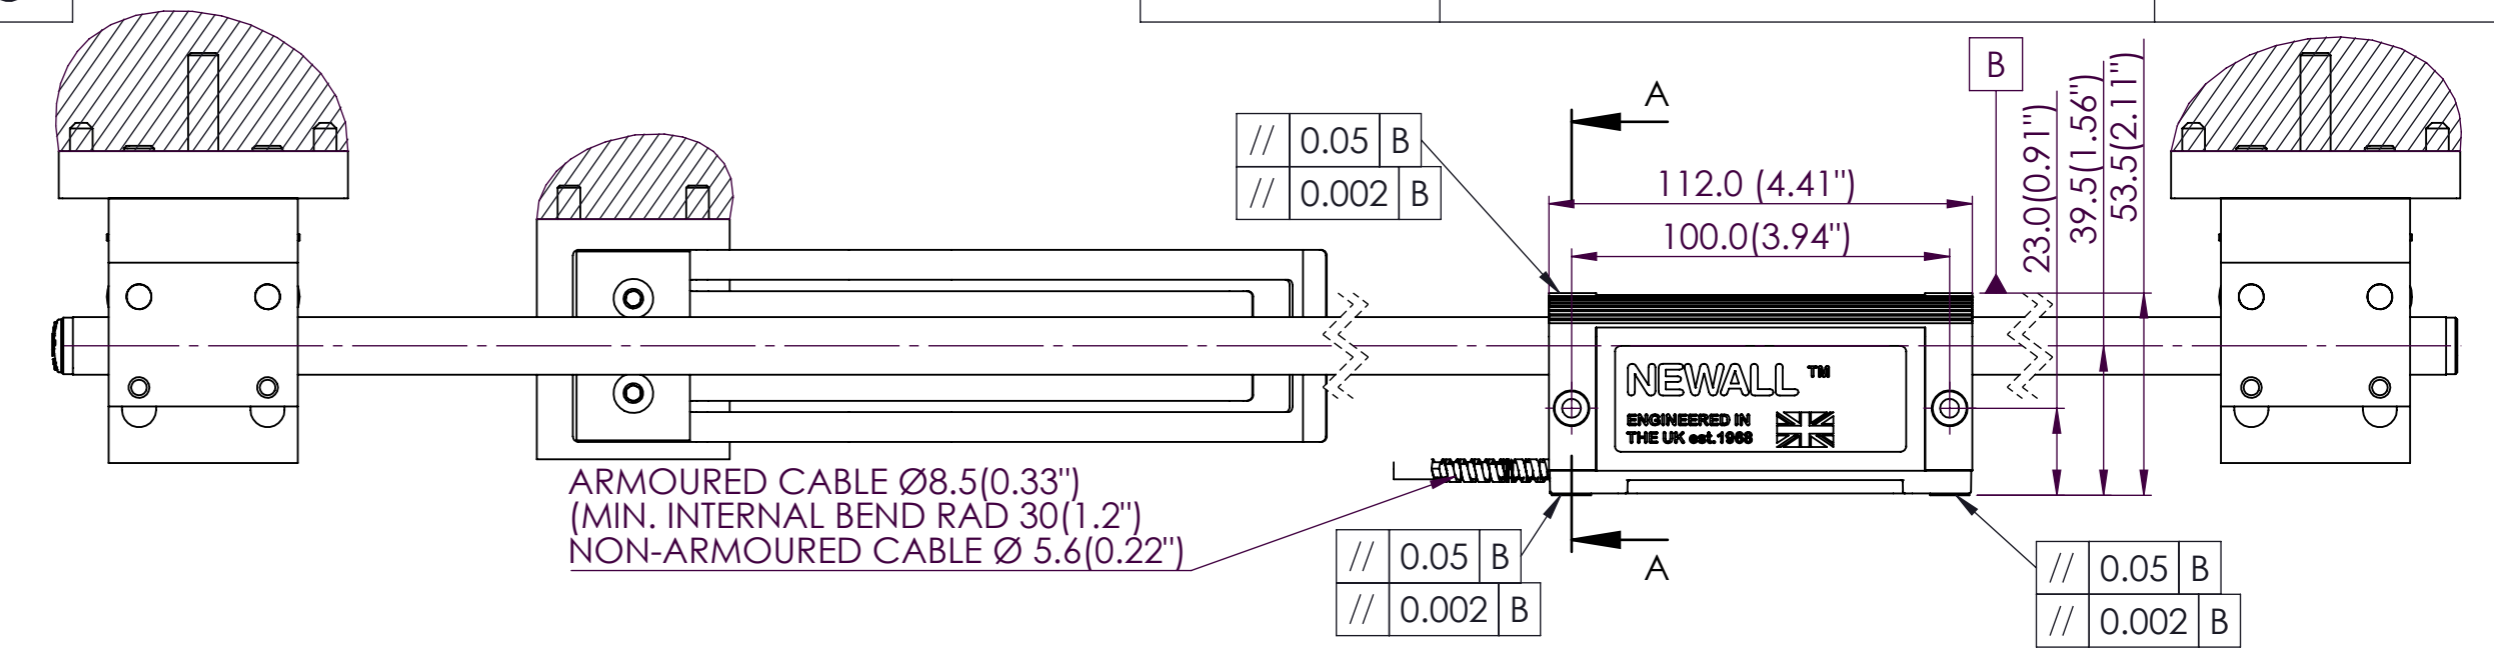

SPRING SUPPORTS ARE INTENDED FOR USE WHERE THE READER HEAD IS MOVING AND THE SCALE TUBE IS STATIONARY
REFER TO INSTALLATION MANUAL FOR RECOMMENDED NUMBER AND POSITONAL DETAILS OF SPRING SUPPORTS

| | | | | | | | | | |
|--|--|--|--|-----------------------------|--|--|--|--|--|
| | | | | MATERIAL: N/A | | NOTE: ENSURE: SHARP EDGES AND BORES ARE DEBURRED SURFACE FINISH HAS NO BLEMISHES OR SCRATCHES AND PARTS ARE CLEAN | | | |
| | | | | FINISH: N/A | | SCALE: 1:10 | | TOLERANCES:- 0 DECIMAL PLACES ±0.5 1 DECIMAL PLACE ±0.2 2 DECIMAL PLACES ±0.1 ANGULAR ±1° | |
| | | | | WEIGHT: 1.23 KG | | SHEET 1 OF 1 | | DRAWING NUMBER 316-88301 | |
| TITLE: SPHEROSYN SERIAL INSTALL DRAWING (>100) | | | | DRAWN: A.HARDING 21/02/2024 | | SHEET 1 OF 1 | | REV. ISS. 0 | |
| REV DATE ECO ALTERATION | | | | CHECKED: APPROVED: | | Leicester NEWALL England | | THIS DRAWING IS THE PROPERTY OF NEWALL MEASUREMENT SYSTEMS LIMITED. THE INFORMATION THEREON MAY NOT BE COPIED OR USED WITHOUT WRITTEN PERMISSION | |