

PRESSURE SENSORS IN INJECTION MOLDING MACHINES

Background

Injection molding is a very common process used for producing plastic, glass or metal parts. This process consists of passing the desired material through a heating and mixing process ($\geq 10X$ for FS ≤ 400 bar) parts such as bottles, cases, automotive parts, etc. An injection molding machine usually has 2 main sections, the injection unit and the clamping unit.

The injection unit is responsible for heating the material in a reciprocating screw barrel and reliably dispensing it into the mold cavity.

The injection mold material typically flows at high pressures and if the injection pressure is not correct, it could lead to defective molded parts, damage to the mold, and machine downtime.

The clamping unit is responsible for actuating the mold and for keeping the mold closed during injection of the mold material. During this process clamping forces need to be controlled because excess clamping force can result in damage to the mold, costly downtime and mold repair, while insufficient pressure will result in defective molded parts or excessive flash.

Using a high-quality pressure sensor can help minimize poor injection molded part quality and prolong tool life.

Solution


Applying pressure sensors that can withstand high pressures and deliver repeatable accuracy with a long life cycle are utilized to help control and provide feedback to the cylinder and clamping unit controls. Using a high-quality pressure sensor can help minimize poor injection molded part quality and prolong tool life.

Sensata Technologies, a world leader in pressure sensors, has developed the PTE7100 for use in hydraulic applications including injection mold equipment. The PTE7100 features a hermetic pressure port design with multiple connectors and process port options, $\pm 0.25\%$ BFSL accuracy and operating media temperatures of -40°C to 125°C . The PTE7100 also features a snubber option to help dampen extreme pressure spikes and has a guaranteed cycle life of $\geq 10M$ cycles with positive testing of the technology to a half billion cycles.






RECOMMENDED PRODUCTS

Reference on Diagram	Product	Features	Function	Brand
1	 PTE7100	<ul style="list-style-type: none"> Operating pressure range: 0-50 bar to 0-600 bar (0-725psi to 0-8700 psi) ±0.25% BFSL accuracy High shock (500g) and vibration (30g) Multiple connector and port options High burst pressures (≥10X for full scale pressure ≤400 bar) 	Monitor clamping unit and injection unit pressures	Sensata Technologies



INJECTION MOLDING MACHINE

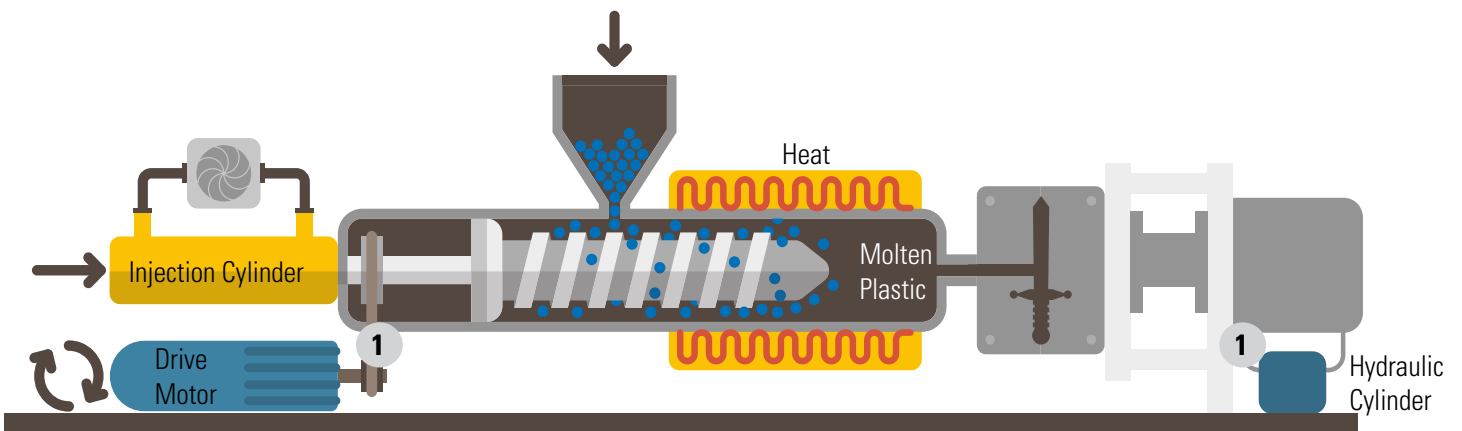

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727
sensors@sensata.com
switches@sensata.com

Europe, Middle East & Africa

+359 (2) 809 1826
pressure-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006
ext 2808