

SOLID STATE RELAYS IN ENVIRONMENTAL TEST EQUIPMENT

Background

Environmental test chambers are widely used to test the performance of products, materials, components and equipment under specific environmental conditions to ensure that they will be able to withstand such conditions once they are used on their specific fields of application.

This involves controlling different ambient parameters within the chamber such as temperature, humidity, vibration, and acceleration among others. Depending of the type of application. (commercial, industrial, aerospace, military) the tests might have to be determined by specific standards, such as IEC 60068 and MIL-STD-810, for example.

Solid state relays are ideal for start/stop applications, offering a better performance than EMR solutions.

Environmental chambers can vary from small chambers, the size of a cooking oven, up to walk-in chambers, the size of a small room.

Solution

Environmental chambers need to provide precise control of the ambient temperature inside the chamber by heating and/or cooling as required. This can be achieved by several ways, one of the most common is the use of resistive heating elements. Another common heating method is by using infrared lamps.





Sensata | Crydom solid state relays are perfect for heating control due to their fast response time and extended life expectancy, which allows them to be used in applications where a precise control of the temperature is required. For cooling and for controlling the humidity, some larger and more expensive types of chambers use a fully integrated refrigeration system, but most commonly these chambers use fans/blowers and an array of solenoid valves, which can be switched with our large variety of AC and DC output SSRs. Our solid state relays are ideal for start/stop applications, offering a better performance than EMR solutions.

Some newer types of small chambers make use of Peltier Effect devices to provide thermoelectric heating and cooling. Depending on the polarity of the voltage applied to these devices, they can either cool or heat a surface. Sensata | Crydom DC reversing contactors, which include an "H Bridge" configuration, are an excellent option for driving this type of circuit.






RECOMMENDED PRODUCTS

Reference on Diagram	Product	Features	Function	Brand
1	 DR22 Series	<ul style="list-style-type: none"> DIN Rail mount single phase solid state relay 20 to 35 Amp ratings Relay or contactor configuration 	Heating Control	Crydom
2	 SeriesOne DR	<ul style="list-style-type: none"> Compact DIN Rail mount solid state relay (11 or 18mm) AC or DC output 3 to 24 Amp ratings 	Solenoid Valves On/Off Control	Crydom
3	 ED Series	<ul style="list-style-type: none"> Solid state relay in industry standard plug-in package AC or DC output Ratings from 3 to 10 Amps 	Solenoid Valves On/Off Control	Crydom
4	 DRC3P Series	<ul style="list-style-type: none"> 3-Phase solid state contactor Ratings of 4.8 & 7.6 Amps per phase Available with auxiliary contacts 	Fan On/Off Control	Crydom



ENVIRONMENTAL TEST CHAMBER

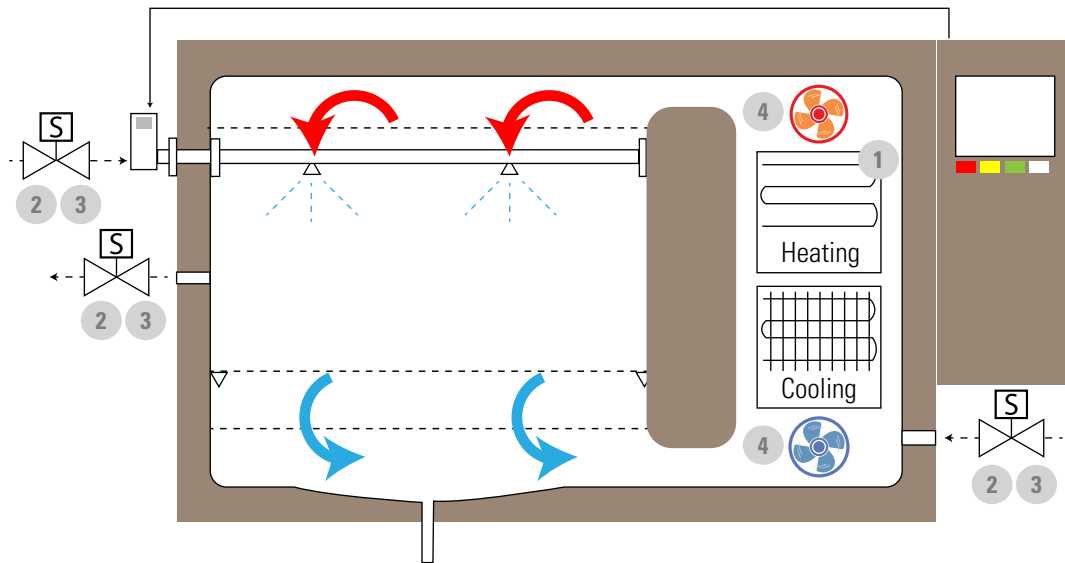

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements, and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-ELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Americas

+1 (877) 502 5500 – Option 2
sales.crydom@sensata.com

Europe, Middle East & Africa

+44 (1202) 416170
ssr-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
 China +86 (21) 2306 1500
 Japan +81 (45) 277 7117
 Korea +82 (31) 601 2004
 India +91 (80) 67920890
 Rest of Asia +886 (2) 27602006
 ext 2808