

SENSATA SOLUTIONS FOR CONVEYOR BELT SYSTEMS

Background

Factory automation is growing in demand globally. Suppliers and distributors have seen a dramatic increase in the volume of goods, adding to the need for more automated warehouses. To meet this demand, manufacturers are building new automated plants while retrofitting old factories to increase productivity. At the core of factory automation is the conveyor belt. This application moves product from point A to point B in an efficient manner, while also allowing the items that travel on it to be sorted, augmented or modified in some way. Factory outfitters and manufacturers are looking for ways to decrease wear and tear, increase capabilities and improve communication of conveyor belt systems.

Solution

Maintenance reduction, downtime reduction and control are three core areas in which conveyor systems can be improved. End users want to reduce the cost of wear and tear on the components that drive the conveyor system. The less maintenance required, the fewer headaches both operationally and financially. Users also want to reduce downtime of their system because downtime is lost production and therefore a loss in revenue. Finally, coordination between different applications across the conveyor system is increasing in importance as the entire factory becomes one ecosystem.

Switches and controllers are used to power the motors that move the conveyor belt. Our solid state relays and hybrid motor starters include functions that provide added control over the motor that drives the conveyor. Those added functions include soft start, soft stop, and motor reversing. Additionally, solid state relays have no moving parts which reduce wear and tear and increase the longevity of the application.

Position sensors are at the core of conveyor systems. They are used to determine the movement of the belt system and the materials on the belt system. Encoders are used to determine the speed of the belt and specialty encoders are used to provide extra control of the system. For example, encoders are able to limit the maximum speed to ensure human safety near the conveyor system. Encoder modules supplement the signals encoders produce to help overcome application barriers. They can remove interference from high vibration environments or take an encoder and broadcast the signal to various downstream operations.





Position sensors are at the core of conveyor systems. They are used to determine the movement of the belt system and the materials on the belt.







RECOMMENDED PRODUCTS

Reference on Diagram	Product	Function	Features	Brand
----------------------	---------	----------	----------	-------

Switches & Relays

1	 SOLICON DRC Series	The DRC series is a solid state contactor, built for frequent switching on 3-phase loads. It offers an interlock control that allows only off, forward and reverse operation in a safe mode, which can be utilized in conveyor systems that need to control the belt in the presence of humans.	<ul style="list-style-type: none"> Interlock control allows safe forward and reversing operation Fits 35mm DIN Rail Rated for 3-phase loads up to 5 HP, 600 VAC, 7.6 Amps 	Crydom
2	 DRMS Series	The DRMS series is a hybrid motor starter. It offers soft start, soft stop and motor reversing functions in a compact 22.5mm package. The soft start, stop and motor reversing functions extend the lifetime of conveyor systems; while the motor functions offer additional control on the movement of the belt.	<ul style="list-style-type: none"> Soft Start, Soft Stop, and Motor Reversing Functions Built-In Overload Protection Optional Mains Isolating Relay 	Crydom
3	 DRA3R/DRA3P Series	The DRA3 series is a solid state relay, capable of switching loads and motor reversing for small 3-phase AC motors up to 2 HP. Its 61mm wide DIN rail package doesn't require heat sinking up to 60°C, makes it an ideal, low-cost option for conveyor systems.	<ul style="list-style-type: none"> No Heat-sinking required up through 60°C UL and IEC Motor Ratings 5 Variations of input control voltage available 	Crydom
4	 DP Series	The DP4R is a DC reversing solid state contactor, which can be used for demanding DC applications that require frequent switching. It comes with reversing control and optional soft start, soft stop functions. It has an LED input status indicator that shows which direction control (forward, reverse) is being activated.	<ul style="list-style-type: none"> Convenient FET switches in H-Bridge configuration Optional Soft Start w/Brake, Soft Start/Soft Stop no Brake cULus Recognized, IEC Rated, CE & RoHS Compliant 	Crydom

Position Sensors

5	 H25 Series	Encoders sense rotary position and are quintessential to the performance of conveyor belts. Optical encoders have high resolution and are very precise. They can sense and coordinate conveyor speed with other parts of the system in the loop. The H25 Series is a bread and butter industrial encoder, built robustly for tough environments.	<ul style="list-style-type: none"> Heavy duty precision bearings Meets NEMA 4 and 13 requirements EMI Shielding 	BEI Sensors
6	 DSM Series	Cleaning or clearing conveyor jams means downtime and reduced productivity. Functional safety encoders can work with functional safety controllers and implement "Safety-Limited-Speed" to allow the conveyor to move in a safe manner, while being cleaned or cleared. This speeds up the process and reduces downtime.	<ul style="list-style-type: none"> SIL3 / Cat. 4 PLe rated IP65 (IP69k functional safety encoders available) Shafted and Hollow versions available 	BEI Sensors
7	 Anti-Dither Module	Conveyor systems often can have a high level of wind-up or hysteresis. This can be a byproduct of an application or self-induced for special applications. This variability can cause controller miscounts with the signals produced by encoders. Anti-Dither Modules buffer the encoder signal to "clean up" the output, eliminating controller miscounts.	<ul style="list-style-type: none"> See datasheet for case examples: <ul style="list-style-type: none"> - Case 1 - Starts & Stops - Case 2 - High Vibration 	BEI Sensors
8	 Broadcaster Module	Some conveyor systems need to have multiple point-to-point communications. They may change operation based on the position or speed of one aspect of the application. This may require, for example: upstream position information to be communicated downstream. A Broadcaster Module helps accomplish this communication by isolating and precisely replicating the encoder signals. One Broadcaster Module can reliably transmit four copies of the original signal to various parts of the overall system. It can broadcast upstream encoder signals to downstream encoders or other operations to adjust their performance based on the "master encoder" signal.	<ul style="list-style-type: none"> Broadcasts encoder signals to up to four independent receivers Signal processing modules can be added to each output for additional capabilities Accepts single ended, differential and open collector input voltages 	BEI Sensors



CONVEYOR BELT SYSTEMS

1



SOLICON DRC Series

2



DRMS SERIES

3



DRA3R/DRA3P Series

4



DP Series

5



H25 Series

6



DSM Series

7




Anti-Dither Module

8



Broadcaster Module

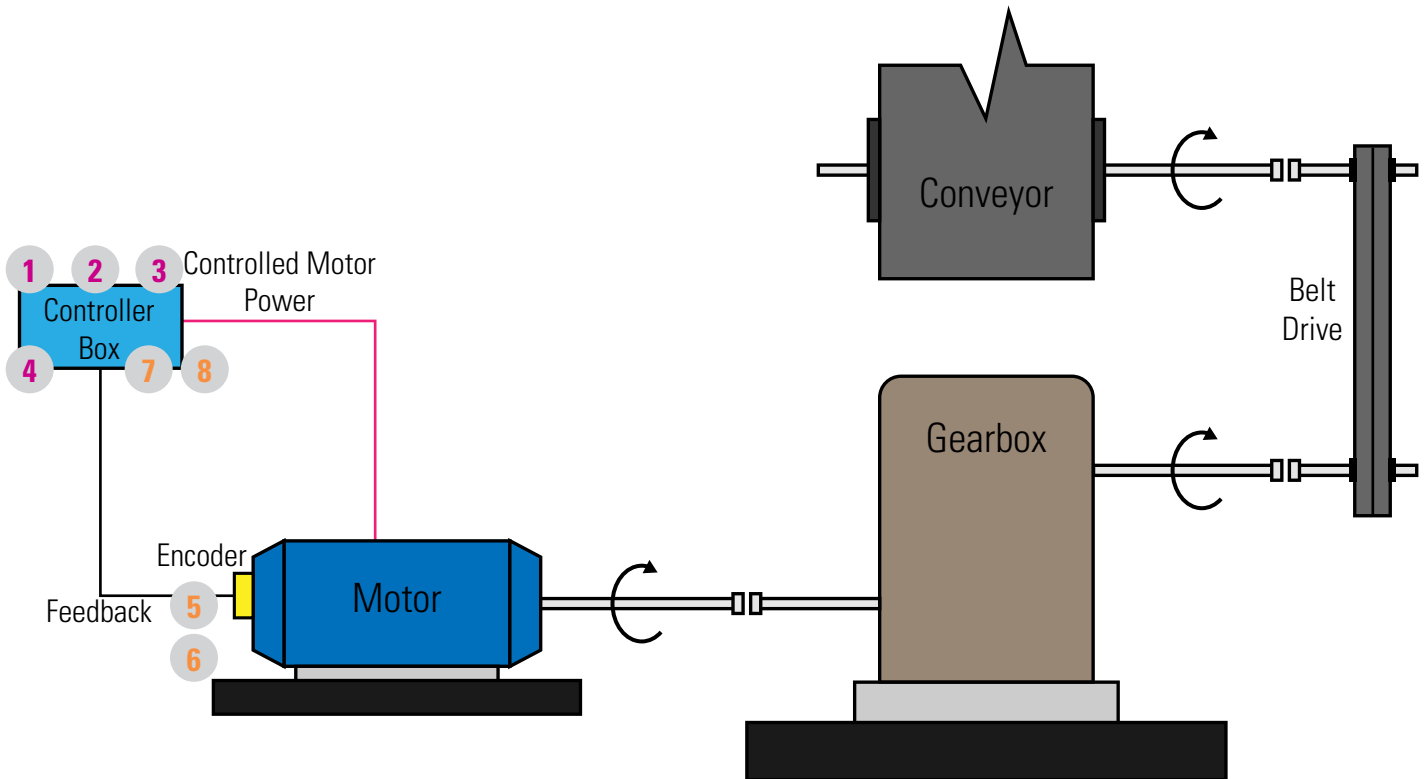

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

Switches & Relays
+1 (877) 502 5500 – Option 2
sales.crydom@sensata.com
Position Sensors
+1 (800) 350 2727
sales.beisensors@sensata.com

Europe, Middle East & Africa

Switches & Relays
+44 (1202) 416170
ssr-info.eu@sensata.com
Position Sensors
position-info.eu@sensata.com
+33 (3) 88 20 8080

Asia Pacific

sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006
ext 2808