



## POWER SUPPLY

FOR ENCODERS AND CONTROLLERS



### Introduction

The small footprint (only 61mm deep) of this DIN Rail (EN 50 022, 35mm X 7.5mm) mountable power supply makes it easy to fit into small enclosures. With a wide range of acceptable input voltages, both AC and DC, it's usable in virtually all industrial applications worldwide. The 5V supply is adjustable over a 4-6.5V range for added capability. Transient surge protection is built-in to reduce faults caused by ESD, power-up transients or phase errors. It also has 100% reserve capacity for startup or overload conditions.

This product carries international approval including UL 60950 for IT equipment and UL 508 for industrial control equipment enabling the device to be used globally. It is also CE rated and conforms to EMC directive 2004/108/EC and low voltage directive 2006/95/EC



### SPECIFICATIONS

#### Input

Description	Value
<b>Voltage Range</b>	85 – 264 V AC 95– 250 V DC
<b>Frequency (AC)</b>	45 – 65 Hz
<b>Switch On Time</b>	< 1 s
<b>Transient Surge Protection</b>	Varistor
<b>Mains Buffering</b>	>25 ms (120 V AC) >140 ms (230 V AC)
<b>Internal Fuse</b>	3.15 Amps to protect power supply


#### Output

Description	Value
<b>Output Voltage</b>	4-6.5 VDC Adjustable (5V supply) 24 VDC Fixed (24V)
<b>Voltage Tolerance</b>	± 1 %
<b>Nominal Output Current</b>	6.5 Amps (5 volt supply) 1.75 Amps (24 volt supply)
<b>Maximum Output Current (&lt;20 sec)</b>	11.5 Amps (5 volt supply), 3.75 Amps (24 volt supply)
<b>Efficiency</b>	> 70% (5 volt supply), > 80% (24 volt supply)
<b>Ripple</b>	<41 mV <sub>pp</sub>

## Environmental

Description	Value
Operating Temperature	-25 to +70°C (>55°C Derate)
Storage Temperature	-40 to +85 °C

## DIMENSIONS

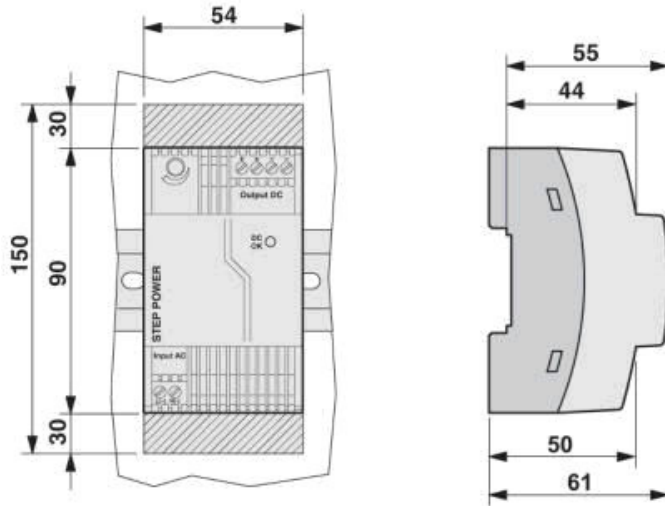

Dimensions in mm.

## ORDERING OPTIONS

Output Voltage	Current	BEI Part Number
5 Volts	6.5 Amps	60008-003
24 Volts	1.75 Amps	60008-004

## AGENCY APPROVALS & CERTIFICATIONS



Made In France

Page 2

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

### Americas

+1 (800) 350 2727  
[sales.beisensors@sensata.com](mailto:sales.beisensors@sensata.com)  
**Europe, Middle East & Africa**  
 +33 (3) 88 20 8080  
[position-info.eu@sensata.com](mailto:position-info.eu@sensata.com)

### Asia Pacific

[sales.isasia@list.sensata.com](mailto:sales.isasia@list.sensata.com)  
 China +86 (21) 2306 1500  
 Japan +81 (45) 277 7117  
 Korea +82 (31) 601 2004  
 India +91 (80) 67920890  
 Rest of Asia +886 (2) 27602006  
 ext 2808