


680 SERIES

QFP

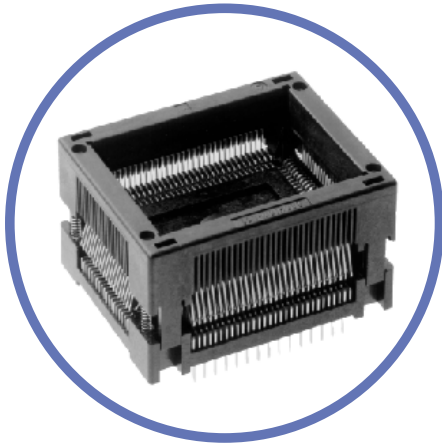

Features

- Open top, Zero Insertion Force design for automatic loading
- Compact outline for maximum board density
- Highly reliable Dual Beam contact design. "H" version.
- Lid actuation force peaks during stroke and drops off at full deflection for ease of use
- Thru hole design

MATERIALS AND SPECIFICATIONS

Socket Body	LCP, PES, PEI or Equivalent
Contact	Beryllium Copper Alloy or Spinodal
Contact Plating	Gold over Nickel
Contact Normal Force	40 grams
Contact Resistance	50 mΩ
Dielectric	300V AC for 1 minute
Temperature Rating	150°C
Insulation Resistance	5,000 MWΩ @ 500V DC
Durability	10,000 cycles min.

Lead Count	Pitch e (mm)	Package Size (mm)	Socket Dimensions (mm)		Package Leads Tip to Tip (mm)	Part Number
			Length (A)	Width (B)		
48	0.5	7X7	24.00	24.00	9X9	* 680H0480111
64	0.80	14X14	31.00	31.00	16X16	* 680H0644111
64	0.80	14X14	31.00	31.00	16X16	* 680H0644111-002
64	1.00	20X14	32.80	26.80	24.70 X 18.70	* 680H0642111

* Dual Beam Contact




Lead Count	Pitch e (mm)	Package Size (mm)	Socket Dimensions (mm)		Package Leads Tip to Tip (mm)	Part Number
			Length (A)	Width (B)		
100	0.65	20X14	29.60	23.60	22X16	680-1001111-001
100	0.65	20X14	31.00	25.00	23.20 X 17.20	680-1001111-002
100	0.65	20.1X14	29.60	23.50	22.10 X 16.00	* 680H1001111X-001
132	0.635	24.13 X 24.13	40.00	40.00	27.432 X 27.432	* 680H1323212-001
144	0.50	20X20	37.00	37.00	22X22	* 680H1440411
144	0.50	20X20	39.30	39.30	22X22	680HA1440111-001
144	0.65	28X28	49.30	49.30	31.225X31.225	680HA1441111-301
176	0.40	20X20	39.00	39.00	22X22	* 680H1765111
176	0.40	20X20	39.00	39.00	22X22	* 680H1765111T

* Dual Beam Contact



DIMENSIONS AND DIAGRAMS


Dimensions in inches

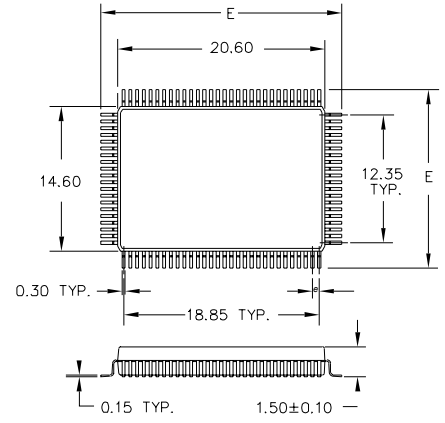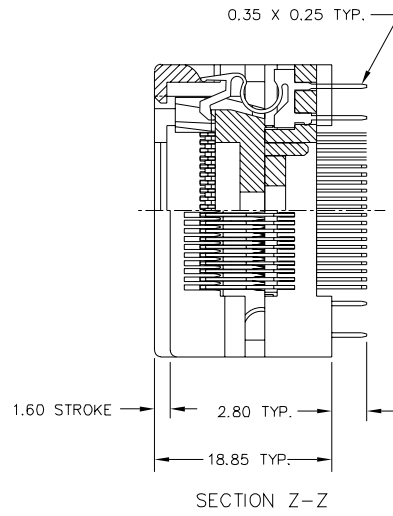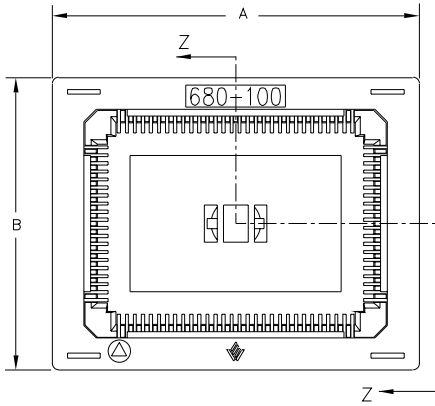



DESCRIPTION & ORDERING INFO

Example : 680 X XXX X X X X-XXX

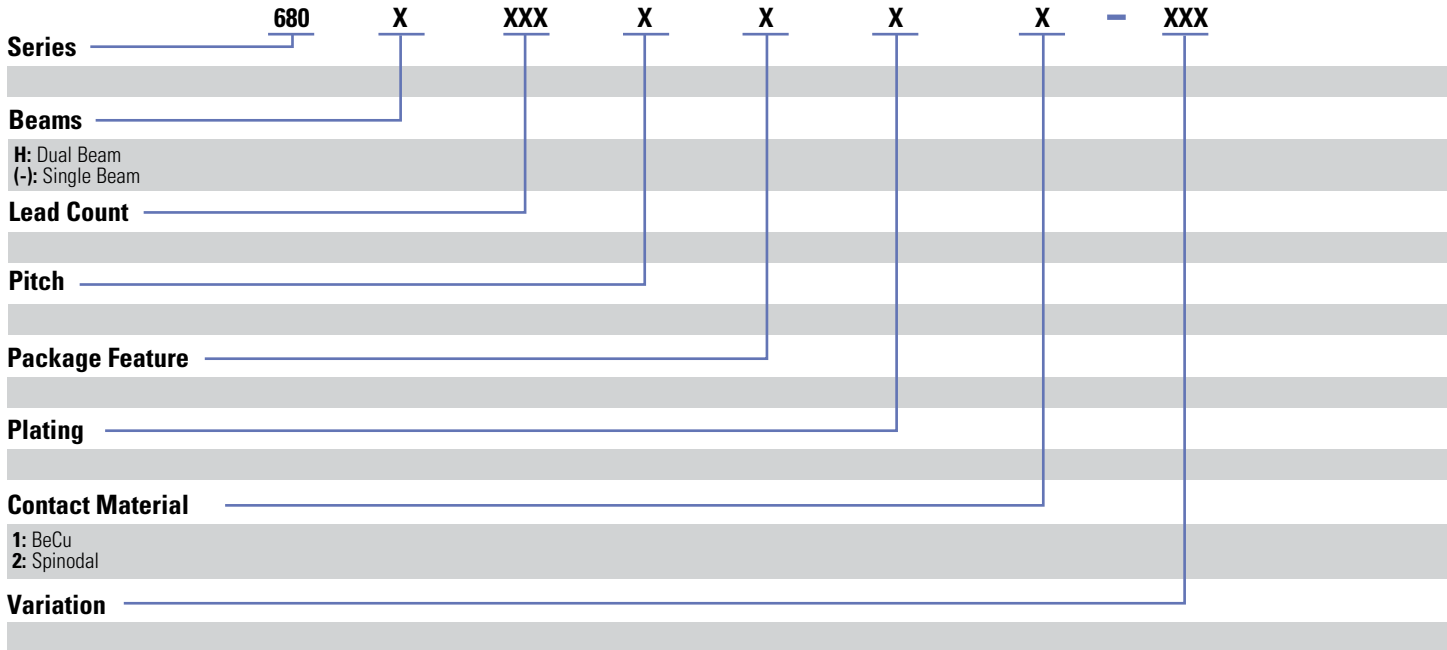

Series

680

X

XXX

X

X

X

X

-

XXX

Beams

H: Dual Beam
(-): Single Beam

Lead Count

Pitch

Package Feature

Plating

Contact Material

1: BeCu
2: Spinodal

Variation

Revised 02/06/18

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

480.682.6148 or 480.681.6116