

| 773 SERIES

Open Top CSP



Features

- 0.4mm pitch
- Compression surface mount
- High performance/low cost achieved through use of carrier loaded stamped contact
- Z-axis compliant buckle beam contact supports any type of solder ball




SPECIFICATIONS

Body Materials	PES, PEI, LCP or Equivalent
Contact Material	Beryllium Copper Alloy
Contact Plating	Gold
Contact Force	13 gram average
Contact Resistance	200-300 mΩ
Temperature Rating	150°C
Durability	10,000 cycles min.



ORDERING OPTIONS

Example : 773-B04025-XXX

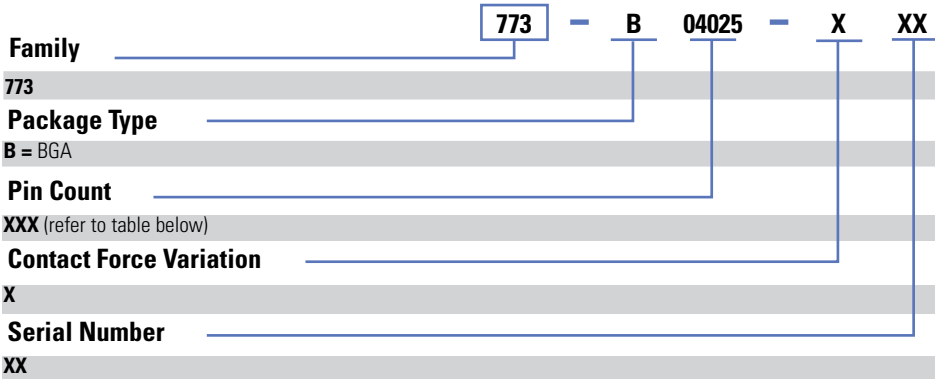

PITCH (mm)	PACKAGE SIZE (mm)	PIN MATRIX	MAX PIN COUNT	BALL DIA. (mm)	BALL HEIGHT (mm)	PART NUMBER
0.4	2.225x2.275	5x5	25	0.28	0.20	773-B04025-XXX
	3.7x3.3	8x6	48	0.28	0.20	773-B04048-XXX
	3x3	7x7	49	0.26	0.165	773-B04049-XXX
	2.44x3.64	6x9	54	0.26	0.21	773-B04054-XXX
	3.17x3.45	7x8	56	0.26	0.20	773-B04056-XXX
	3.16x3.83	7x9	63	0.26	0.20	773-B04063-XXX
	4x4	8x8	64	0.25	0.20	773-B04064-XXX
	4x4	9x9	81	0.25	0.18	773-B04081-XXX
	4.2x4.2	9x9	81	0.25	0.20	773-B04081-XXX
	3.573x4.072	9x10	90	0.26	0.20	773-B0490-XXX
	4.6x4.6	10x10	100	0.26	0.165	773-B04100-XXX
	4.5x4.5	11x11	121	0.25	0.20	773-B04121-XXX
	5x5	11x11	121	0.25	0.165	773-B04121-XXX
	5x6.5	11x14	154	0.25	0.191	773-B04154-XXX
	6x6	13x13	169	0.24	0.13	773-B04169-XXX
	5.29x6.29	13x15	195	0.26	0.20	773-B04195-XXX
	6.5x6.5	14x14	196	0.26	0.20	773-B04196-XXX
	6.2x7.8	14x18	252	0.25	0.17	773-B04252-XXX
	6.5x6.5	16x16	256	0.25	0.18	773-B04256-XXX
	8x8	18x18	324	0.25	0.20	773-B04324-XXX
8x8	20x20	400	0.25	0.18	773-B04400-XXX	
9x9	22x22	484	0.26	0.165	773-B04484-XXX	

Revised 2/7/18

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

Copyright © 2018 Sensata Technologies, Inc.

CONTACT US

480.682.6148 or 480.681.6116

www.sensata.com