



## | 6752-12 SERIES

2½ to 65 Amp, Single-Phase, Ambient Compensated

### Introduction

The Klixon® 6752-12 series thermal-magnetic circuit breakers are designed and manufactured to meet the more stringent military standards of today's aircraft electrical systems.

The interrupting capacity, vibration resistance and longer cycling life of the 6752-12 series exceed previous military standards. In addition, the 6752-12 series provide ambient compensation, fault coordination of all ratings, and an option for auxiliary circuits.



### Features

- Trip-free design
- Single-phase
- Ambient compensated
- MIL-DTL-27715 qualified
- Current rating: 2.5 to 65 amps
- Long, trouble-free operation: 20,000 operating cycles
- High vibration resistance
- High interrupting capacity
- Option available: Auxiliary circuits
- Circuit protection unaffected by temperature fluctuations (ambient compensated from -53.9°C to 93.3°C)
- Only faulted line circuits opened (coordination ratings insure that branch circuit breakers trip first under fault conditions)
- Typical use: Aircraft electrical systems



### PERFORMANCE CHARACTERISTICS

<b>Vibrations</b>	10G minimum, 5–2,000 Hz (other vibration levels available)
<b>Mechanical Shock</b>	25G
<b>Acceleration</b>	10G
<b>Weight</b>	0.2 pound maximum
<b>Interrupt Current</b>	2½–65 amps: 6,000 amps at 30 VDC 2½–50 amps: 6,000 amps at 120 VAC, 400 Hz 65 amps, 3000 amps at 120VAC, 400 Hz
<b>Endurance</b>	5,000 cycles: 120 VAC, 400 Hz inductive 5,000 cycles: 120 VAC, 400 Hz resistive 10,000 cycles: Mechanical, no load 20,000 cycles: Total



## AMPS, VOLTS, MS CROSS

Klixon® Part	Mil-spec Number		Amp	Voltage Drop
6752-12-2½	MS 24571-2	MS 24571-2V	2.5	0.60
6752-12-5	MS 24571-5	MS 24571-5V	5	0.40
6752-12-7½	MS 24571-7	MS 24571-7V	7.5	0.30
6752-12-10	MS 24571-10	MS 24571-10V	10	0.25
6752-12-15	MS 24571-15	MS 24571-15V	15	0.25
6752-12-20	MS 24571-20	MS 24571-20V	20	0.25
6752-12-25	MS 24571-25	MS 24571-25V	25	0.25
6752-12-35	MS 24571-35	MS 24571-35V	35	0.25
6752-12-50	MS 24571-50	MS 24571-50V	50	0.25
6752-12-65	-	-	65	.030

When ordering, request S.R. 12507-356 to mark MS part number with "V".




## CALIBRATION CHART

For a Standard Device

Device	Trip Time (in seconds)		
	200%	500%	1000%
6752-12-2½	12-32	2.30-6.50	0.32-1.10
6752-12-5	14-36	2.50-6.50	0.45-1.10
6752-12-7½	16-40	2.50-7.00	0.34-1.10
6752-12-10	18-42	2.70-7.75	0.45-1.20
6752-12-15	20-45	2.70-8.00	0.36-1.20
6752-12-20	20-48	2.70-8.00	0.36-1.20
6752-12-25	20-50	2.70-9.50	0.36-1.20
6752-12-35	20-53	2.70-8.00	0.36-1.20
6752-12-50	20-55	2.70-10.00	0.36-1.40
6752-12-65	15-65	2.3-7.5	-




## TRIP CURVE

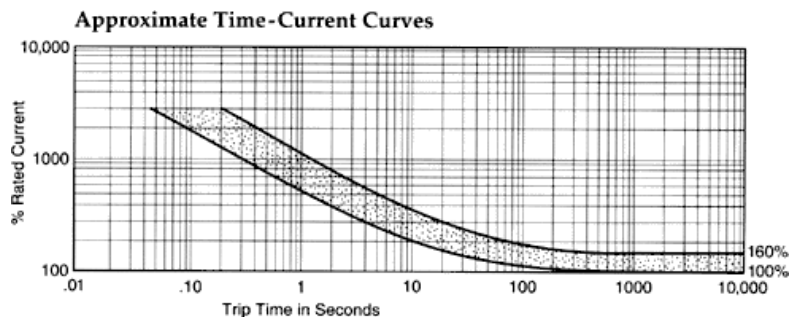



# DIMENSIONS

Dimensions in mm [Inch]

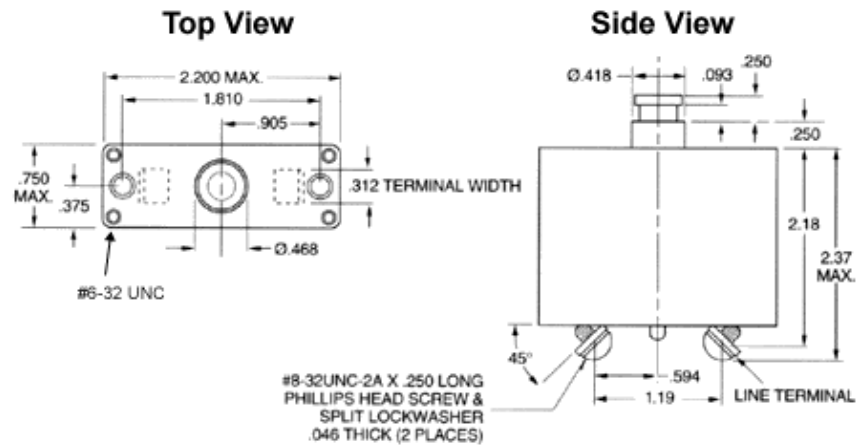

## CONTACT US

### AUTHORIZED DISTRIBUTORS

#### Americas

Flame Enterprises  
 Contact Name:  
 Bob Correa, Director of Product Management  
 Direct Phone: +1 (240) 236-9802  
 E-mail: bcorrea@flamecorp.com  
 info@flamecorp.com | Web  
 Tel: 1-800-854-2255 or 1-818-700-2905  
 Fax: 1-818-407-5080

Peerless Electronics  
 Contact Name:  
 Steve Gunther, National Sales Manager  
 Direct Phone: +1 (516) 594-3509  
 E-mail: sgunther@peerlesselectronics.com  
 nysales@peerlesselectronics.com | Web  
 Tel: 1-800-285-2121  
 Fax: 1-800-222-8096

#### Europe, Middle East & Africa

Flame Enterprises  
 Contact Name:  
 Bob Correa, Director of Product Management  
 Direct Phone: +1 (240) 236-9802  
 E-mail: bcorrea@flamecorp.com  
 info@flamecorp.com | Web  
 Tel: 1-800-854-2255 or 1-818-700-2905  
 Fax: 1-818-407-5080

### AUTHORIZED SALES REPRESENTATIVES

Country	Representative	Contact	e-mail	Phone
Brazil	Sonnensys Technologies	Maury Sampaio	maury.sampaio@sonnensys.com	+55 12 99768 1100
Austria	Telemeter	Robert Jall	rjall@telemeter.de	49 906 70693-26
Belgium	JB Controls	Jean Jacques Boher	jboher@jbcontrols.com	33 (0)1 46 91 93 30
Czech Republic	Telemeter	Robert Jall	rjall@telemeter.de	49 906 70693-26
Denmark	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
Estonia	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
Finland	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
France	JB Controls	Jean Jacques Boher	jboher@jbcontrols.com	33 (0)1 46 91 93 30
Germany	Telemeter	Robert Jall	rjall@telemeter.de	49 906 70693-26
Greece	PanSystem	Stefano Vitone	stefano.vitone@pansystem.com	39 335 7169958
Israel	Admati	Dori Shifman	dori@admati.com	972 (0)50 331 4700
Italy	PanSystem	Stefano Vitone	stefano.vitone@pansystem.com	39 335 7169958
Latvia	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
Lithuania	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
Luxembourg	JB Controls	Jean Jacques Boher	jboher@jbcontrols.com	33 (0)1 46 91 93 30
Netherlands	TBD			
Norway	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
Poland	Radiotechnika	Tomasz Póltoraczyk	tpoltoraczyk@radiotechnika.com.pl	48 7132 70 765
Portugal	PanSystem	Stefano Vitone	stefano.vitone@pansystem.com	39 335 7169958
Slovakia	Telemeter	Robert Jall	rjall@telemeter.de	49 906 70693-26
Spain	PanSystem	Stefano Vitone	stefano.vitone@pansystem.com	39 335 7169958
Sweden	Sensor Control Nordic	Peter BJÖRKDAHL	peter.bjorkdahl@scn.se	46 (0)8 122 006 92
Switzerland	JB Controls	Jean Jacques Boher	jboher@jbcontrols.com	33 (0)1 46 91 93 30
Turkey	Eltronik	Ergun Kosem	ergun@eltronik.com	90 312 440 7815
UK	Charcroft	Julie Protheroe	julie.protheroe@charcroft.com	01591 612240
Australia	AeroDefense	Trent Ralph	trent@aerodefence.com.au	+61 7 5503 0552
China	Pomic Ltd.	James Cai	James.cai@pomicltd.com	+1 (360) 915-7806
China (ACCBs only)	Shanghai Jin Feng Electronics & Inst Co	Wang Min-Gang	yonghuqian@vip.sina.com	+86-21-62712648
India	Hical Technologies	VB Venkatesh	venkatesh.vb@hical.com	+91 98450-12341
Indonesia	Precision Technologies	Aaron Lim	aaronlim@pretech.com.sg	+65 (62) 73 45 73 x125
Japan	Intertek Industries	Masa Ikeda	masai@intertekindustries.com	+1 (310) 309-9661
Korea	Aero Sensors Corp.	Jonathan Jo	jangcho@aerosensors.co.kr	+82 2 557 5355
Malaysia	Precision Technologies	Aaron Lim	aaronlim@pretech.com.sg	+65 (62) 73 45 73 x125
New Zealand	AeroDefense	Trent Ralph	trent@aerodefence.com.au	+61 7 5503 0552
Singapore	Precision Technologies	Aaron Lim	aaronlim@pretech.com.sg	+65 (62) 73 45 73 x125
Taiwan	Sensata Technologies	Bob Jacques	bjacques@sensata.com	+1 (805) 716-0586

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND

NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.