



## | 2TC SERIES

1–25 Amp, Single–Phase, Miniature Ambient Compensated

### Introduction

The Klixon trademark has historically set the standard for aerospace circuit breakers. Despite the small size, the TC series offers the endurance and reliability offered by exacting military and commercial applications.



### Features

- Miniature size
- Light weight
- Trip–free design
- Current ratings 1 to 25 amps
- High vibration resistance
- High interrupting capacity
- Coordinated ratings
- AS58091 qualified (Also: Military Approvals, FAA PMA)
- Typical end use: Aircraft power distribution systems



### PERFORMANCE CHARACTERISTICS

<b>Vibrations</b>	10G minimum, 50–500 Hz (other vibration levels available)	
<b>Mechanical Shock</b>	50G	
<b>Acceleration</b>	10G	
<b>Weight</b>	24 gram maximum (2TC14)	
<b>Interrupt Current</b>	1–20 amps: 6,000 amps at 28 VDC 25 amps: 1,625 amps at 28 VDC 1–15 amps: 2,500 amps at 120 VAC, 400 Hz	20 amps: 2,000 amps at 120 VAC, 400 Hz 25 amps: 1,800 amps at 120 VAC, 400 Hz
<b>Endurance</b>	2,500 cycles: 120 VAC, 400 Hz inductive 5,000 cycles: 120 VAC, 400 Hz resistive 2,500 cycles: 30 VDC inductive	5,000 cycles: 30 VDC resistive 10,000 cycles: Mechanical, no load



## CALIBRATION CHART


For a Standard Device

Temp.	Minimum Ultimate Trip	Maximum Ultimate Trip	Trip Time (in seconds)		
			200%	500%	1000%
25°C	115%	138%	4–16	0.40–1.60	0.10–0.40
-54°C	115%	165%	7–35	0.60–3.00	0.15–0.70
121°C	85%	145%	2–13	0.25–1.00	0.06–0.25

*For others, please contact us.*



## TRIP CURVE

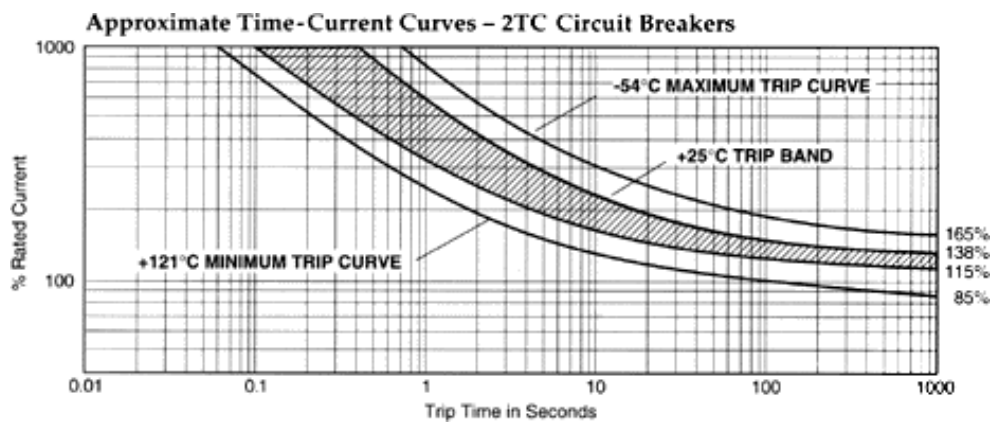

## VOLTAGE DROP

Amp Rating	Max. Voltage Drop*
1	1.10
2	0.70
2 ½	0.50
3	0.40
4	0.45
5	0.35
7 ½	0.30
10	0.28
15	0.25
20	0.25
25	0.20

\*Maximum voltage drop at nominal rated current.



2TCX - X

Family

- 2TC2
- 2TC14
- 25C27
- 25C49

Amp Rating

- 1 = 1 amp
- 2 = 2 amp
- 2 ½ = 2 ½ amp
- 3 = 3 amp
- 4 = 4 amp
- 5 = 5 amp
- 7 ½ = 7 ½ amp
- 10 = 10 amp
- 15 = 15 amp
- 20 = 20 amp
- 25 = 25 amp

Revised 2/6/18

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

508-236-2551  
 electrical-protection-sales@  
 sensata.com

Europe, Middle East & Africa

+31743578156  
 info-sse@list.sensata.com

Asia Pacific

sales.isasia@list.sensata.com  
 China +86 (21) 2306 1500  
 Japan +81 (45) 277 7117  
 Korea +82 (31) 601 2004  
 India +91 (80) 67920890  
 Rest of Asia +886 (2) 27602006  
 ext 2808