

“TWO PIECE” 3/4” X 1” CARRIER FOR FLATPACKS WITH STRAIGHT




- Over 100 standard carriers in addition to thousands of custom versions
- More designs and tooling than any other manufacturer
- Can be molded of Electro-Static-Dissipative (ESD) materials
- Used to fully automate handling, testing and processing
- Notches on the carrier body assure proper orientation
- Can be molded of high temperature materials for applications up to 200°C

Part Number	Lead Count	Device Dimensions (mm)		Recommended Clip	Notes
		Width	Length		
029-188-OXX	14	.175 (4.45)	.390 (9.91)	039-566-OXX	Consult Factory
029-403-OXX	14	.265 (6.73)	.390 (9.91)	039-566-OXX	
029-003-OXX	14	.298 (7.57)	.390 (9.91)	039-566-OXX	
029-585-OXX	14	.298 (7.57)	.390 (9.91)	039-566-OXX	
029-560-OXX	16	.298 (7.57)	.390 (9.91)	039-566-OXX	
029-582-OXX	16	.298 (7.57)	.390 (9.91)	039-566-OXX	
029-583-OXX	16	.420 (10.67)	.520 (13.21)	039-584-00X	
029-577-OXX	24	.420 (10.16)	.630 (16.00)	039-578-00X	

“TWO PIECE” 3/4” X 1” CARRIER FOR FLATPACKS WITH FORMED LEADS

These carriers are designed to hold flatpack devices upside down, as shown below.

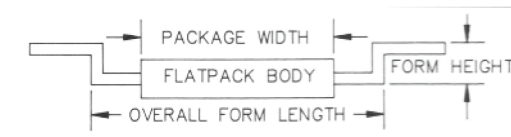


Part Number	Lead Count	Device Dimensions (mm)		Form Length (mm)	Form Height (mm)	Recommended Clip	Notes
		Width	Length				
029-533-OXX	14	.205 (5.21)	.390 (9.91)	.275 (6.99)	.033 (0.84)	039-534-00X	Consult Factory
029-417-OXX	14	.265 (6.73)	.390 (9.91)	.380 (9.65)	.025 (0.64)	039-566-00X	Consult Factory
029-565-OXX	14	.280 (7.11)	.390 (9.91)	.515 (13.08)	.020 (0.51)	039-566-00X	Consult Factory



DIMENSIONS

Dimensions in mm [Inch]

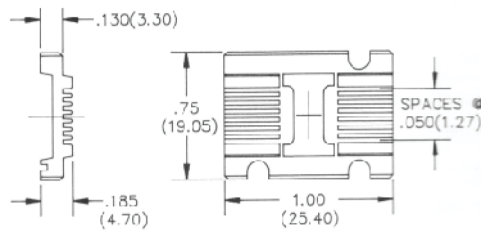

Drawing of basic 14-lead carrier without clip (others available upon request)

Revised 11/15/17

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

CONTACT US

480.682.6148 or 480.681.6116